



ARES CHROME-PLATED ELECTRIC

height 1462 mm, lenght 580 mm. Chrome-plated finish (cod. 50).

Technical features:

- electric steel towel warmer radiator
- horizontal elements with round tubes 23 mm diameter
- side manifolds with a 40x30 mm semioval section
- power cable, length 1200 mm, schuko plug
- complete with thermal liquid

Price included:

- 3 chrome-plated infratube for wall fixing

Finishes available

Surcharge

Chrome-plated (cod. 50)

Electric heaters available

ELECTRIC HEATING ELEMENT WITH ON/OFF SWITCH (TYPE I)



Electric heating element with built-in ON/OFF switch. Insulation class: I. Protection index: IP54. The electronics are supplied in glossy chrome color.

ELECTRIC HEATING ELEMENT WITH REGULATOR TO CONTROL THE INTERNAL TEMPERATURE OF THE FLUID (TYPE K)



Electric heating element with 4-pole connector with electronic thermostat for regulating the temperature of the internal fluid. Insulation class: I. Protection index: IP44. The electronics are supplied in glossy chrome color.

ELECTRIC HEATING ELEMENT WITH IR ELECTRONIC CONTROL (TYPE H)



RF Wireless digital electronic control for regulating the ambient temperature, programmable weekly. Insulation class: II. Protection index: IP44. The electronics are supplied in glossy chrome color.



WIFI CONTROL UNIT *

Control your radiator remotely using the Irsap.now app available from the store (Android and iOS).

Compatible with the systems:




* Available only for UE and CH.

ELECTRIC HEATING ELEMENT WITH WI-FI ELECTRONIC CONTROL (TYPE E)




WiFi electronic control for regulating the ambient temperature, programmable weekly. Insulation class: II. Protection index: IP24.



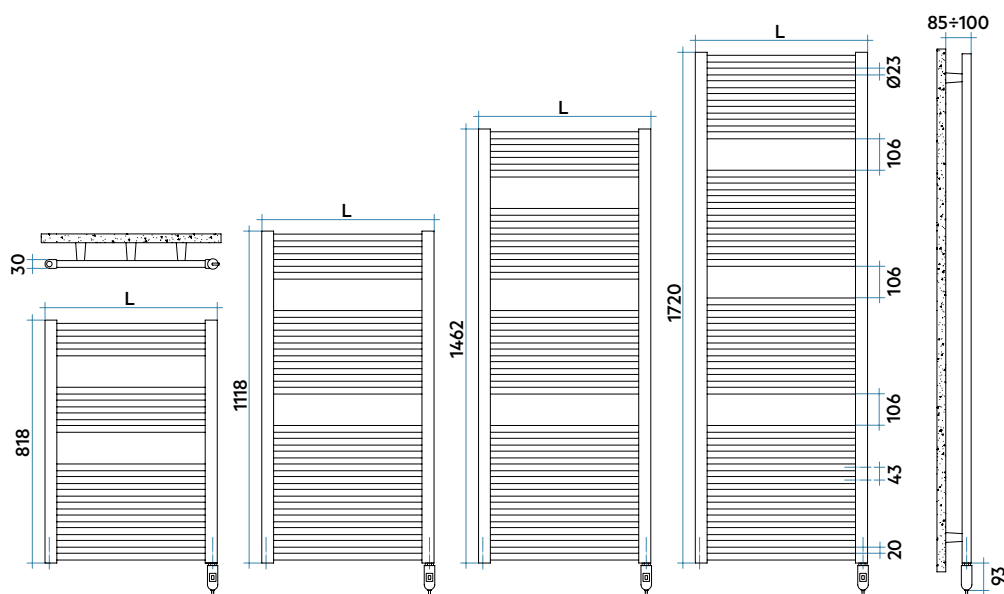


ARES CHROME-PLATED ELECTRIC WITH SWITCH (I)




Model	Code	Depth	Height	Width	Weight	Electric Power
		P mm	H mm	L mm	Kg	Watt
818 - 15 rails - 2 espaces	EIS058 I 50 IR 01 NNN	30	818	580	10,1	300
1118 - 22 rails - 2 espaces	EIM050 I 50 IR 01 NNN	30	1118	500	12,8	300
	EIM058 I 50 IR 01 NNN	30	1118	580	14,2	400
1462 - 28 rails - 3 espaces	EIL050 I 50 IR 01 NNN	30	1462	500	16,3	400
	EIG050 I 50 IR 01 NNN	30	1720	500	19,4	400
1720 - 34 rails - 3 espaces	EIG058 I 50 IR 01 NNN	30	1720	580	21,7	700

ARES CHROME-PLATED ELECTRIC WITH REGULATOR TO CONTROL THE INTERNAL TEMPERATURE OF THE FLUID (K)




Model	Code	Depth	Height	Width	Weight	Electric Power
		P mm	H mm	L mm	Kg	Watt
818 - 15 rails - 2 espaces	EIS058 K 50 IR 01 NNN	30	818	580	9,9	300
	EIM050 K 50 IR 01 NNN	30	1118	500	12,6	300
1118 - 22 rails - 2 espaces	EIM058 K 50 IR 01 NNN	30	1118	580	14,0	400
1462 - 28 rails - 3 espaces	EIL050 K 50 IR 01 NNN	30	1462	500	16,3	400
	EIG050 K 50 IR 01 NNN	30	1720	500	19,4	400
1720 - 34 rails - 3 espaces	EIG058 K 50 IR 01 NNN	30	1720	580	21,7	700

ARES CHROME-PLATED ELECTRIC WITH ELECTRONIC CONTROL (H)



Model	Code	Depth	Height	Width	Weight	Electric Power
		P mm	H mm	L mm	Kg	Watt
818 - 15 rails - 2 espaces	EIS058 H 50 IR 01 NNN	30	818	580	10,3	300
1118 - 22 rails - 2 espaces	EIM050 H 50 IR 01 NNN	30	1118	500	13,2	300
	EIM058 H 50 IR 01 NNN	30	1118	580	14,4	400
1462 - 28 rails - 3 espaces	EIL050 H 50 IR 01 NNN	30	1462	500	16,7	400
	EIG050 H 50 IR 01 NNN	30	1720	500	19,8	400
1720 - 34 rails - 3 espaces	EIG058 H 50 IR 01 NNN	30	1720	580	22,0	700

ARES CHROME-PLATED ELECTRIC WITH WI-FI ELECTRONIC CONTROL (E)



Model	Code	Depth	Height	Width	Weight	Electric Power
		P mm	H mm	L mm	Kg	Watt
818 - 15 rails - 2 espaces	EIS058 E 50 IR 01 NNN	30	818	580	10,6	300
1118 - 22 rails - 2 espaces	EIM050 E 50 IR 01 NNN	30	1118	500	13,2	300
	EIM058 E 50 IR 01 NNN	30	1118	580	14,7	400
1462 - 28 rails - 3 espaces	EIL050 E 50 IR 01 NNN	30	1462	500	16,8	400
	EIG050 E 50 IR 01 NNN	30	1720	500	19,9	400
1720 - 34 rails - 3 espaces	EIG058 E 50 IR 01 NNN	30	1720	580	22,2	700

Key Codes

Width	Chrome-plated finish code				
EIS058I	50	IR	01	NNN	
Height		Packing code			

