



FLAUTO

height 1218 mm, lenght 556 mm. Opaque Black finish (cod. K1).



Technical features:

- steel towel warmer radiator
- horizontal elements featuring round tubes 18 mm diameter
- side manifolds with a 30 mm round section
- manifold threading 1/2" Gas right
- maximum working pressure 8 bar
- maximum working temperature 95°C

Price included:

- 2 CHELA wall brackets
- wall spacer
- 1/2" air vent

Special options and surcharges:

Radiators can be supplied with no. 1 1/2" coupling welded laterally for the connection to a single-pipe system and no. 2 1/2" couplings welded laterally to a manifold (Cod. B10).



Surcharge for two 1/2" couplings welded to a lateral manifold and an internal diaphragm (**Cod. B10**)

CAUTION: when this latter special working is present, correct operation is possible only when the lower outlet coupling is in axial alignment with the lowest pipe. Whenever this coupling is higher, all the pipes below will remain cold because they are not involved in the flow of water.




Prearrangement for monotube valve (**Cod. B14, B15**)


Finishes available	Surcharge
Standard White	
Classic finished	
Special finished	
Other RAL colors	

Finishing codes see page 596.

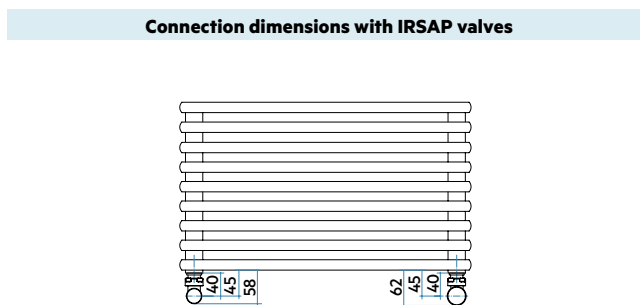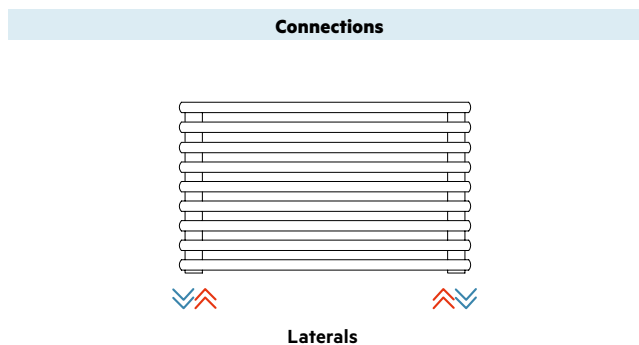

For other types of connections see pag. 414

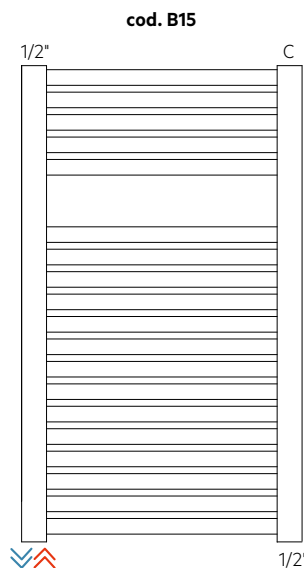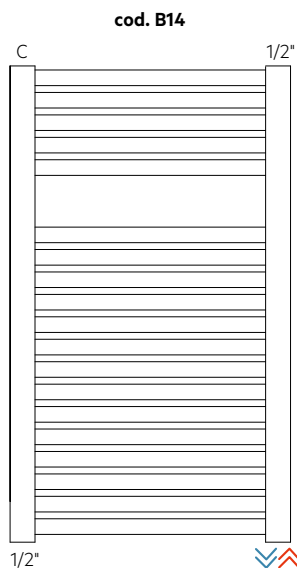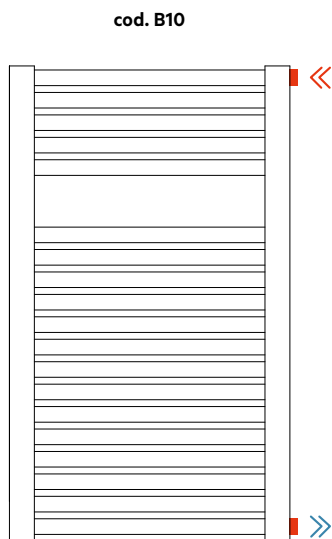

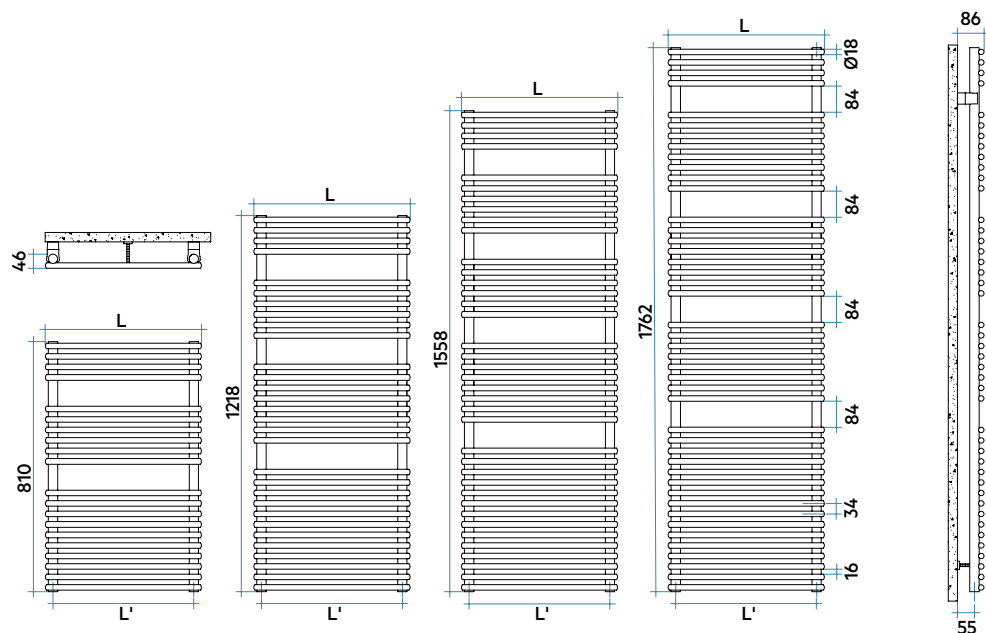

Model	Code	Depth mm	Height mm	Width mm	Conn.			Thermal Power					Exp. n.
					centre mm	Weight Kg	Cap. lt	Δt=50°C Btu/h	Δt=50°C Watt	Δt=40°C Watt	Δt=30°C Watt (°)	Δt=20°C Watt	
810 20 rails 2 espaces	FTP045 B 01 IR 01 NNN	46	810	456	406	5,6	2,8	1402	411	316	225	139	1,179
	FTP050 B 01 IR 01 NNN	46	810	506	456	6,1	3,0	1522	446	343	244	152	1,177
	FTP055 B 01 IR 01 NNN	46	810	556	506	6,5	3,1	1642	481	370	264	164	1,175
	FTP060 B 01 IR 01 NNN	46	810	606	556	7,0	3,3	1764	517	398	284	176	1,173
	FTP075 B 01 IR 01 NNN	46	810	756	706	8,4	3,9	2127	623	480	343	214	1,167
1218 30 rails 3 espaces	FTM045 B 01 IR 01 NNN	46	1218	456	406	8,4	4,1	2044	599	460	327	202	1,187
	FTM050 B 01 IR 01 NNN	46	1218	506	456	9,1	4,4	2212	648	498	354	219	1,184
	FTM055 B 01 IR 01 NNN	46	1218	556	506	9,8	4,7	2380	698	536	382	236	1,181
	FTM060 B 01 IR 01 NNN	46	1218	606	556	10,5	5,0	2548	747	574	409	254	1,177
	FTM075 B 01 IR 01 NNN	46	1218	756	706	12,5	5,9	3051	894	689	492	307	1,168
1558 38 rails 4 espaces	FTL045 B 01 IR 01 NNN	46	1558	456	406	10,6	5,2	2613	766	586	415	255	1,200
	FTL050 B 01 IR 01 NNN	46	1558	506	456	11,5	5,6	2844	834	639	454	280	1,191
	FTL055 B 01 IR 01 NNN	46	1558	556	506	12,4	6,0	3075	901	692	493	305	1,181
	FTL060 B 01 IR 01 NNN	46	1558	606	556	13,2	6,4	3307	969	746	533	331	1,172
	FTL075 B 01 IR 01 NNN	46	1558	756	706	15,9	7,5	4001	1172	908	654	411	1,144
1762 44 rails 4 espaces	FTG045 B 01 IR 01 NNN	46	1762	456	406	12,2	6,0	3048	893	682	482	295	1,207
	FTG050 B 01 IR 01 NNN	46	1762	506	456	13,2	6,5	3293	965	739	523	322	1,199
	FTG055 B 01 IR 01 NNN	46	1762	556	506	14,3	6,9	3538	1037	795	565	349	1,190
	FTG060 B 01 IR 01 NNN	46	1762	606	556	15,3	7,3	3783	1109	852	606	376	1,181
	FTG075 B 01 IR 01 NNN	46	1762	756	706	18,3	8,6	4518	1324	1023	734	460	1,155

Mix.	
Funct.	
Watt	Code
400	ANRES400WDI
400	ANRES400WDI
400	ANRES400WDI
400	ANRES400WDI
400	ANRES400WDI
400	ANRES400WDI
700	ANRES700WDI
700	ANRES700WDI
700	ANRES700WDI
700	ANRES700WDI
700	ANRES700WDI
1000	ANRES1000WDI
1000	ANRES1000WDI
700	ANRES700WDI
1000	ANRES1000WDI
1000	ANRES1000WDI
1000	ANRES1000WDI
1000	ANRES1000WDI

(*) Thanks to the high performance of Irsap FLAUTO radiators, the ideal Δt for low temperature projects is Δt at 30°C.

For Δt different from 50°C use the formula: $Q = Q_n (\Delta t / 50)^n$


To order a radiator in the mixed version put the code of the Standard version + the code of the corresponding electric heater

Example: Mod. 1218 x 756: **FTM075 B 01 IR 01 NNN** (€ 308,06) + **ANRES700WDI** (€ 183,57) = Tot. € 491,63


Key Codes

Width	Standard White colour code - for different colour codes see the colors page
Height	Packing code
	Standard hydraulic code connection


Decorative & Technical Accessories



Kit Valves and
Lockshield valve
Pag. 562



Pipe cover kit
Pag. 566



Electronic Control
Pag. 574

