



FLAUTO CHROME-PLATED

height 1218 mm, lenght 506 mm. Chrome-plated finish (cod. 50).



Technical features:

- steel towel warmer radiator
- horizontal elements featuring round tubes 18 mm diameter
- side manifolds with a 30 mm round section
- manifold threading 1/2" Gas right
- maximum working pressure 8 bar
- maximum working temperature 95°C

Price included:

- pair of chela wall brackets
- wall spacer
- 1/2" chrome-plated air vent

Special options and surcharges:

Radiators can be supplied with no. 1 1/2" coupling welded laterally for the connection to a single-pipe system and no. 2 1/2" couplings welded laterally to a manifold (Cod. B10).


Surcharge for two 1/2" couplings welded to a lateral manifold and an internal diaphragm (**Cod. B10**)

CAUTION: when this latter special working is present, correct operation is possible only when the lower outlet coupling is in axial alignment with the lowest pipe. Whenever this coupling is higher, all the pipes below will remain cold because they are not involved in the flow of water.

Prearrangement for monotube valve (**Cod. B14, B15**)

Finishes available	Surcharge
Chrome-plated	


Connections




Laterals

For other types of connections see pag. 414


Connection dimensions with IRSAP valves




cod. B10

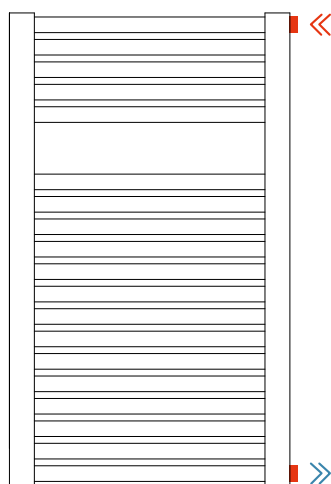


cod. B14

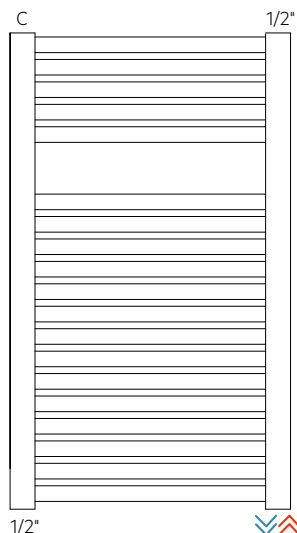

cod. B15

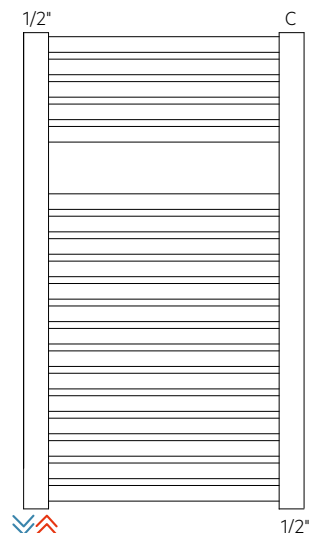

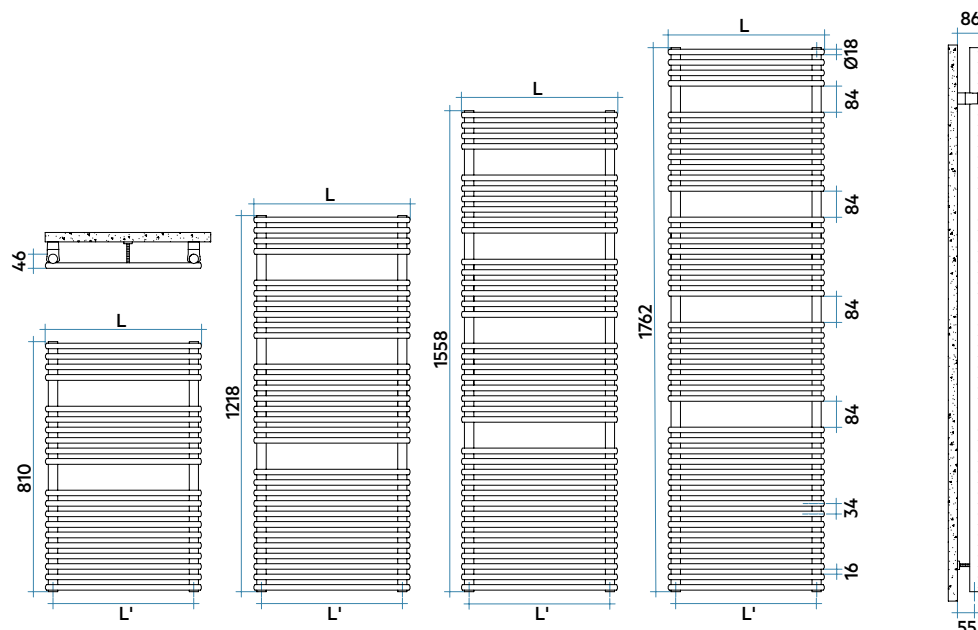

Model	Code	Depth	Height	Width	Conn. centre	Weight	Cap.	Thermal Power					Exp.	Mix. Funct.
								$\Delta t=50^{\circ}\text{C}$	$\Delta t=40^{\circ}\text{C}$	$\Delta t=30^{\circ}\text{C}$	$\Delta t=20^{\circ}\text{C}$			
		mm	mm	mm	mm	Kg	lt	Btu/h	Watt	Watt	Watt (°)	Watt	n	Watt
810 20 rails 2 espaces	FTP045 B 50 IR 01 NNN	46	810	456	406	5,6	2,8	926	271	209	149	92	1,180	300 ANRES300WDI50
	FTP050 B 50 IR 01 NNN	46	810	506	456	6,1	3,0	1023	300	230	164	102	1,178	300 ANRES300WDI50
	FTP055 B 50 IR 01 NNN	46	810	556	506	6,5	3,1	1120	328	252	180	112	1,177	300 ANRES300WDI50
	FTP060 B 50 IR 01 NNN	46	810	606	556	7,0	3,3	1216	356	274	196	121	1,176	300 ANRES300WDI50
	FTP075 B 50 IR 01 NNN	46	810	756	706	8,4	3,9	1506	442	340	243	151	1,172	400 ANRES400WDI50
1218 30 rails 3 espaces	FTM045 B 50 IR 01 NNN	46	1218	456	406	8,4	4,1	1359	398	303	214	130	1,220	400 ANRES400WDI50
	FTM050 B 50 IR 01 NNN	46	1218	506	456	9,1	4,4	1480	434	331	233	142	1,218	400 ANRES400WDI50
	FTM055 B 50 IR 01 NNN	46	1218	556	506	9,8	4,7	1601	469	358	252	154	1,217	400 ANRES400WDI50
	FTM060 B 50 IR 01 NNN	46	1218	606	556	10,5	5,0	1721	504	385	271	166	1,215	400 ANRES400WDI50
	FTM075 B 50 IR 01 NNN	46	1218	756	706	12,5	5,9	2083	610	466	329	202	1,209	400 ANRES400WDI50
1558 38 rails 4 espaces	FTL045 B 50 IR 01 NNN	46	1558	456	406	10,6	5,2	1761	516	391	274	165	1,243	400 ANRES400WDI50
	FTL050 B 50 IR 01 NNN	46	1558	506	456	11,5	5,6	1927	565	429	301	183	1,232	400 ANRES400WDI50
	FTL055 B 50 IR 01 NNN	46	1558	556	506	12,4	6,0	2092	613	467	328	200	1,222	400 ANRES400WDI50
	FTL060 B 50 IR 01 NNN	46	1558	606	556	13,2	6,4	2258	662	505	356	218	1,212	700 ANRES700WDI50
	FTL075 B 50 IR 01 NNN	46	1558	756	706	15,9	7,5	2754	807	620	442	274	1,180	700 ANRES700WDI50
1762 44 rails 4 espaces	FTG045 B 50 IR 01 NNN	46	1762	456	406	12,2	6,0	1979	580	440	307	186	1,243	400 ANRES400WDI50
	FTG050 B 50 IR 01 NNN	46	1762	506	456	13,2	6,5	2162	634	481	337	204	1,237	700 ANRES700WDI50
	FTG055 B 50 IR 01 NNN	46	1762	556	506	14,3	6,9	2345	687	522	367	223	1,230	700 ANRES700WDI50
	FTG060 B 50 IR 01 NNN	46	1762	606	556	15,3	7,3	2528	741	564	397	242	1,223	700 ANRES700WDI50
	FTG075 B 50 IR 01 NNN	46	1762	756	706	18,3	8,6	3077	902	689	488	299	1,203	1000 ANRES1000WDI50

(*) Thanks to the high performance of Irsap FLAUTO CHROME-PLATED radiators, the ideal Δt for low temperature projects is Δt at 30°C .

For Δt different from 50°C use the formula: $Q=Q_n (\Delta t / 50)^n$


To order a radiator in the mixed version put the code of the Standard version + the code of the corresponding electric heater

Example: Mod. 1762 x 456: **FTG045 B 50 IR 01 NNN** (€ 989,59) + **ANRES400WDI50** (€ 175,13) = Tot. € 1.164,72


Key Codes

Width		Chrome-plated finish code		
FT P 045 B		50	IR	01 NNN
Height	Packing code		Standard hydraulic code connection	


Decorative & Technical Accessories



Kit Valves and
Lockshield valve
Pag. 562



Pipe cover kit
Pag. 566



Electronic Control
Pag. 574

