

### Technical features:

- steel towel warmer
- 23 mm diameter horizontal round bar heating elements
- 30 mm diameter round lateral manifolds
- threading at the ends of the manifolds right Gas 1/2"
- maximum working pressure 4 bar
- maximum working temperature 95°C
- maximum capacity of the towel rails: 7 kg

**Price included:**

- 3 wall fixings
- 1 venting valve of 1/8" for radiators model M (height 1076 mm);  
1 venting valve of 1/8" and 1 venting valve of 1/2" for radiators model L  
(height 1499 mm)


Finishes available	Surcharge
Standard White	
Classic finished	
Special finished	
Other RAL colors	

**Finishing codes see page 596.**

A diagram of a window blind system. It features a series of horizontal slats held together by a central control bar. At the bottom, there is a rail with a switch mechanism, indicated by a small rectangular button and a series of dots. Red and blue arrows point upwards from the bottom corners, suggesting the direction of movement or force.

## Booster

# GET UP AIR MIX

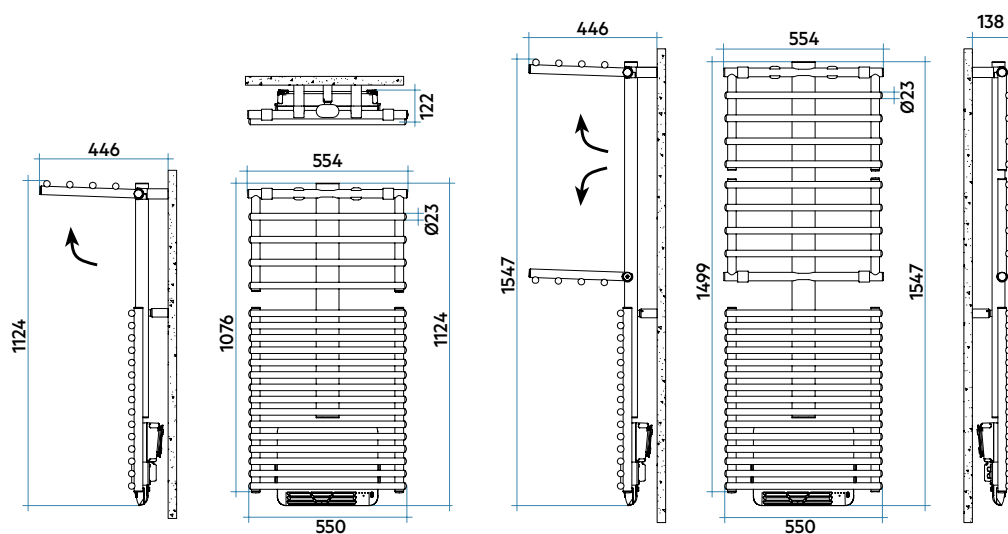

									Therma Power					Auxiliary heater	
Model	Code	Depth	Height	Width	Conn. C.	Weight	Cap.	Δt=50°C	Δt=40°C	Δt=30°C	Δt=20°C	Exp.	with diffuser		
		Open/Closed						Open/Closed	Open/Closed	Open/Closed					
		P mm						H mm	L mm	L' mm	Kg			lt	Btu/h
1076 20 rails 1 espace	GCM055B 01 IR 01 NNN	385/122	1124	550	500	17,2	6,9	2132/1830	625/536	473/396	330/268	199/155	1,251	+ 1000	
1499 25 rails 2 espaces	GCL055B 01 IR 01 NNN	385/122	1547	550	500	22,1	9,2	2644/2410	775/706	583/527	403/362	240/213	1,278	+ 1000	

(\*) Thanks to the high performance of Irsap GET UP AIR MIX radiators, the ideal Δt for low temperature projects is Δt at 30°C.  
For Δt different from 50°C use the formula:  $Q = Q_n (\Delta t / 50)^n$

## Key Codes

Standard White colour code - for different colour codes see the colors page

Width

Height

Packing code

GC M 055 B 01 IR 01 NNN

## Wireless Remote Control for booster control

GET UP AIR MIX is equipped with a wireless controller that allows remote management of every electric radiator function. Because the controller is wireless, it has the advantage of being quick and easy to install and does not require any modifications within the home.

## REELETTTRAS2501N

### Technical specifications

Wireless communication via radio signals transmitted to the receiver connected to the system.

- Approx. 30-50 metre range in residential environments (868 MHz)
- Radiofrequency communication pursuant to European standards
- You can activate the manual functions

