



IT IS

height 1208 mm, lenght 500 mm. Chrome-plated finish (cod. 50).

Designed by Angeletti & Ruzza



Technical features:

- horizontal elements featuring rectangular tubes 60x20 mm section
- side manifolds with a 70x20 mm squared section
- 3/8" Gas right threading
- maximum working pressure 4 bar
- maximum working temperature 95°C

Price included:

- angle pattern valve and lockshield valve assembly complete with copper fitting (diameters 12, 14, and 15 mm), multilayer pipes (14 x 2 thick and 16 x 2 thick)
- kit of pipe covers (suitable for pipes up to 16 mm thick)
- wall fixing system
- air vent chrome-plated
- 1 towel rail bracket to match the radiator

Finishes available

Surcharge

Chrome-Plated (cod. 50)

IT IS ACCESSORIES

The accessories of the It Is product are a unique design element that can be fitted at any time even after installation of the product, at any height you want. The accessories allow the diversification / customisation of It Is, making it suitable for many settings (bathroom, living room, etc.). The accessories are available in 2 widths, 500 and 600 mm and in glossy chrome-plated finish.



Fig. 1


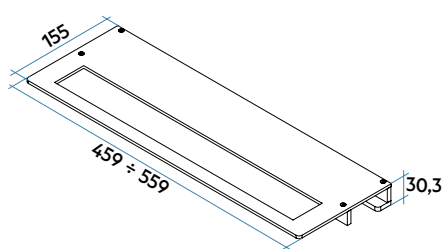


Fig. 2

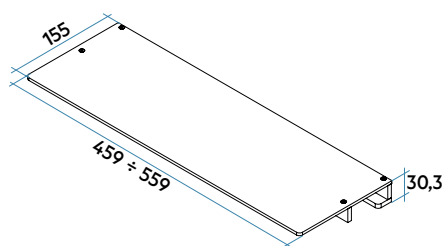

Code

Towel rail accessory, width 500 mm, chrome-plated (Fig. 1)

ANSTEITS500F50

Towel rail accessory, width 600 mm, chrome-plated (Fig. 1)


ANSTEITS600F50

Flat accessory, width 500 mm, chrome-plated (Fig. 2)

ANSTEITS500P50

Flat accessory, width 600 mm, chrome-plated (Fig. 2)

ANSTEITS600P50

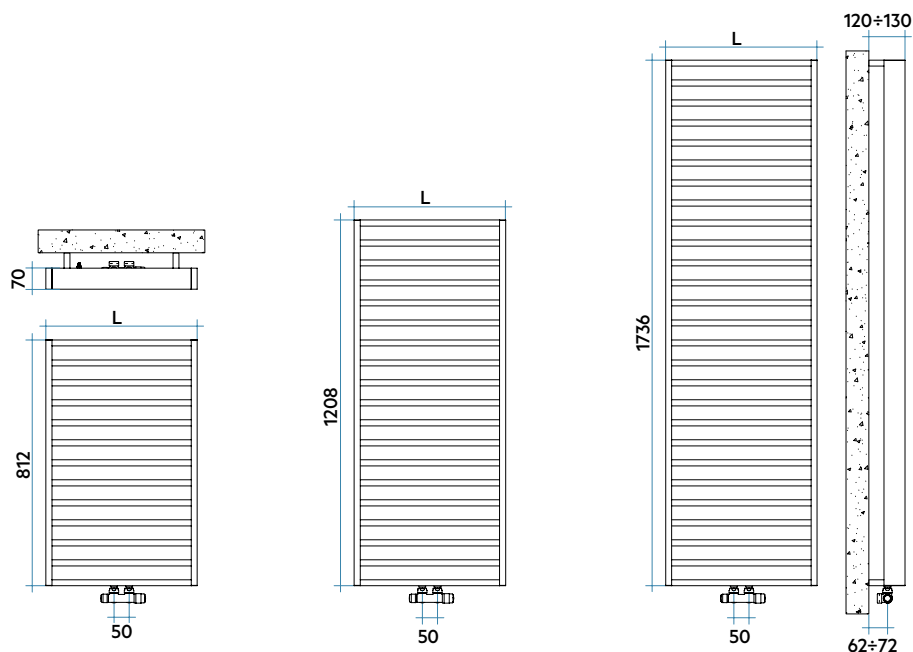

Model	Code	Depth mm	Height mm	Width mm	Conn. C. mm	Weight Kg	Cap. lt	Thermal Power					Exp. n.
								$\Delta t=50^{\circ}\text{C}$ Btu/h	$\Delta t=50^{\circ}\text{C}$ Watt	$\Delta t=40^{\circ}\text{C}$ Watt	$\Delta t=30^{\circ}\text{C}$ Watt (*)	$\Delta t=20^{\circ}\text{C}$ Watt	
812	ITP050B XX IR 01 NNN	70	812	500	50	11,1	1,4	1146	336	254	177	107	1,250
13 rails	ITP060B XX IR 01 NNN	70	812	600	50	13,0	1,6	1392	408	310	218	132	1,230
1208	ITL050B XX IR 01 NNN	70	1208	500	50	16,3	2,0	1730	507	385	270	164	1,230
19 rails	ITL060B XX IR 01 NNN	70	1208	600	50	19,0	2,3	1976	579	440	309	188	1,230
1736	ITE050B XX IR 01 NNN	70	1736	500	50	23,2	2,8	2532	742	563	394	238	1,240
27 rails	ITE060B XX IR 01 NNN	70	1736	600	50	27,1	3,3	2781	815	618	433	262	1,240

(*) Thanks to the high performance of Irsap IT IS radiators, the ideal Δt for low temperature projects is Δt at 30°C .
For Δt different from 50°C use the formula: $Q=Q_n (\Delta t / 50)^n$

Key Codes

Width	Chrome-plated finish code				
IT	P	050	B	50	IR 01 NNN
Height	Packing code				Standard hydraulic code connection

