

**NET**

height 1760 mm, lenght 500 mm. Edelweiss White finish (cod. 34).
Designed by Synthesis Design



Technical features:

- steel towel warmer radiator
- horizontal elements with rectangular tubes 20x25 mm section
- side round manifolds with a 30 mm diameter
- manifold threading 1/2" Gas right
- maximum working pressure 4 bar
- maximum working temperature 95°C

Price included:

- 4 wall fixing in the same color as the radiator
- 1/2" air vent

Special options and surcharges:

Radiators can be supplied with no. 1 1/2" coupling welded laterally for the connection to a single-pipe system and no. 2 1/2" couplings welded laterally to a manifold (Cod. B10).


Surcharge for two 1/2" couplings welded to a lateral manifold and an internal diaphragm (**Cod. B10**)

CAUTION: when this latter special working is present, correct operation is possible only when the lower outlet coupling is in axial alignment with the lowest pipe. Whenever this coupling is higher, all the pipes below will remain cold because they are not involved in the flow of water.





Prearrangement for monotube valve (**Cod. B14, B15**)


Finishes available	Surcharge
Standard White	
Classic finished	
Special finished	
Other RAL colors	

Finishing codes see page 596.

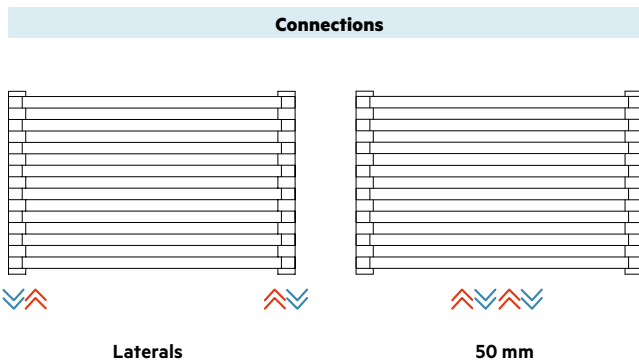

For other types of connections see pag. 414

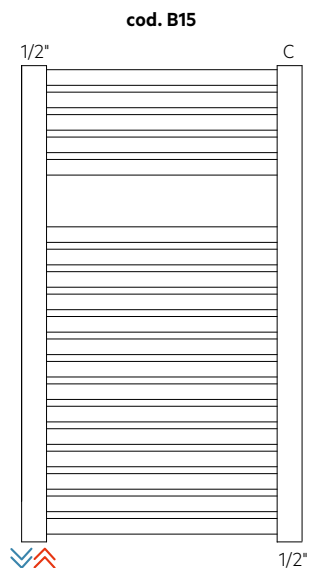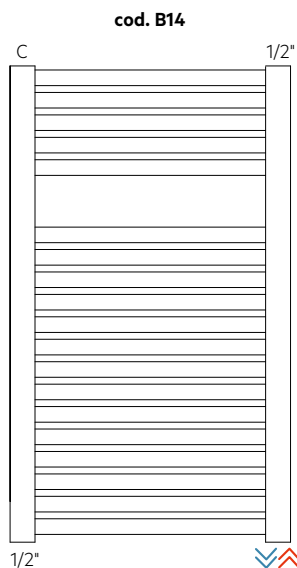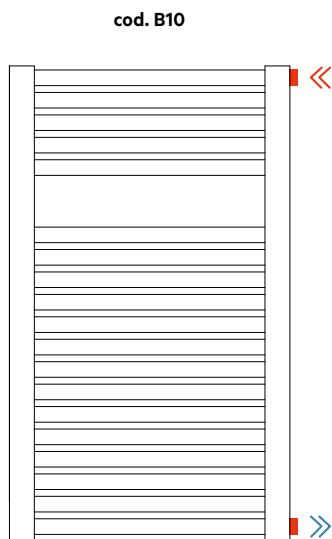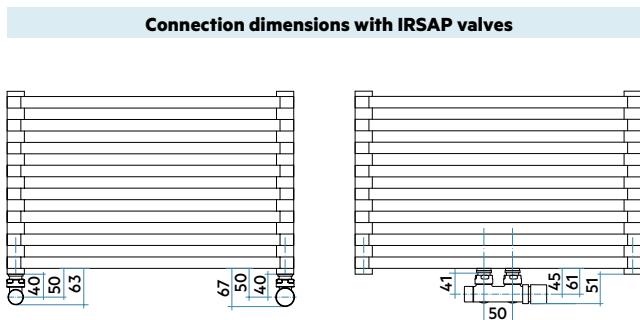

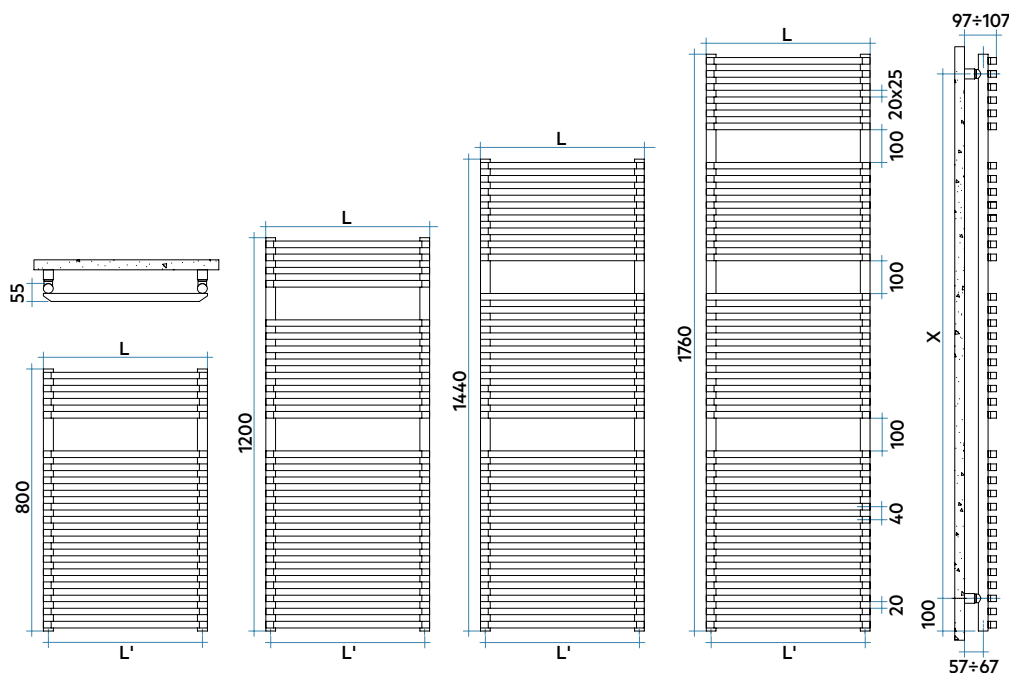

L mm	L' mm
500	470
600	570
750	720

H mm	X mm
800	640
1200	1040
1440	1280
1760	1600



Model	Code	Depth	Height	Conn.				Thermal Power					Exp.
				Width	centre	Weight	Cap.	Δt=50°C	Δt=40°C	Δt=30°C	Δt=20°C		
				mm	mm	mm	Kg	lt	Btu/h	Watt	Watt	Watt (°)	
800 18 rails 1 espace	NTS050 B 01 IR 01 NNN	55	800	500	470	7,7	4,6	1525	447	340	239	145	1,230
	NTS060 B 01 IR 01 NNN	55	800	600	570	9,0	5,3	1836	538	412	293	180	1192
	NTS075 B 01 IR 01 NNN	55	800	750	720	10,9	6,4	2300	674	518	370	229	1176
1200 26 rails 2 espaces	NTM050 B 01 IR 01 NNN	55	1200	500	470	11,2	6,7	2252	660	504	355	218	1,211
	NTM060 B 01 IR 01 NNN	55	1200	600	570	13,0	7,8	2682	786	602	426	263	1197
	NTM075 B 01 IR 01 NNN	55	1200	750	720	15,8	9,3	3327	975	750	535	332	1175
1440 32 rails 2 espaces	NTL050 B 01 IR 01 NNN	55	1440	500	470	13,7	8,2	2672	783	597	421	257	1,216
	NTL060 B 01 IR 01 NNN	55	1440	600	570	15,9	9,5	3173	930	712	504	310	1,200
	NTL075 B 01 IR 01 NNN	55	1440	750	720	19,3	11,4	3924	1150	885	631	392	1175
1760 38 rails 3 espaces	NTE050 B 01 IR 01 NNN	55	1760	500	470	16,4	9,8	3214	942	718	507	310	1,214
	NTE060 B 01 IR 01 NNN	55	1760	600	570	19,0	11,3	3808	1116	854	605	372	1198
	NTE075 B 01 IR 01 NNN	55	1760	750	720	23,0	13,7	4698	1377	1060	756	470	1174

Mix.	
Funct.	
Watt	Code
400	ANRES400WDI
400	ANRES400WDI
700	ANRES700WDI
700	ANRES700WDI
700	ANRES700WDI
1000	ANRES1000WDI
700	ANRES700WDI
1000	ANRES1000WDI
1000	ANRES1000WDI
1000	ANRES1000WDI
1000	ANRES1000WDI
1000	ANRES1000WDI

(*) Thanks to the high performance of Irsap NET radiators, the ideal Δt for low temperature projects is Δt at 30°C.

For Δt different from 50°C use the formula: $Q = Q_n (\Delta t / 50)^\alpha$

To order a radiator in the mixed version put the code of the Standard version + the code of the corresponding electric heater


Example: Mod. 1440 x 750: **NTL075 B 01 IR 01 NNN** (€ 293,29) + **ANRES1000WDI** (€ 197,29) = Tot. € 490,58

Key Codes


Width	Standard White colour code - for different colour codes see the colors page
NT S 050 B	
01	Packing code
IR	
01	Standard hydraulic code connection
NNN	
Height	

Width	Standard White colour code - for different colour codes see the colors page
NT S 050 B	
01	Packing code
IR	
05	Code for 50 mm couplings
NNN	
Height	


Decorative & Technical Accessories



Kit Valves and Lockshield valve
Pag. 562



Pipe cover kit
Pag. 566



Electronic Control
Pag. 574

