

Technical features:

- electric steel towel warmer radiator
- horizontal elements featuring rectangular tubes 20x25 mm section
- side round manifolds with a 30 mm diameter
- the radiator is filled with a cooling liquid and is combined with a booster system of electric power of 1000 watts.

This blower system provides a uniform temperature as the room in which it is installed.

Price included:

- 4 adjustable wall fixing brackets in the same color of the radiator
- Wireless remote control

Finishes available	Surcharge
Standard White	
Classic finished	
Special finished	
Other RAL colors	

Finishing codes see page 596.




Booster



MAIN CHARACTERISTICS OF AIR DIFFUSER

- ON/OFF switch
- Power supply 230 V 50 Hz, 1 ph
- Power installed = 1000 W
- Insulation: CLASS II
- Protection index: IP24
- Long electricity cable: 1.200 mm, SCHUKO plug
- Wireless remote control

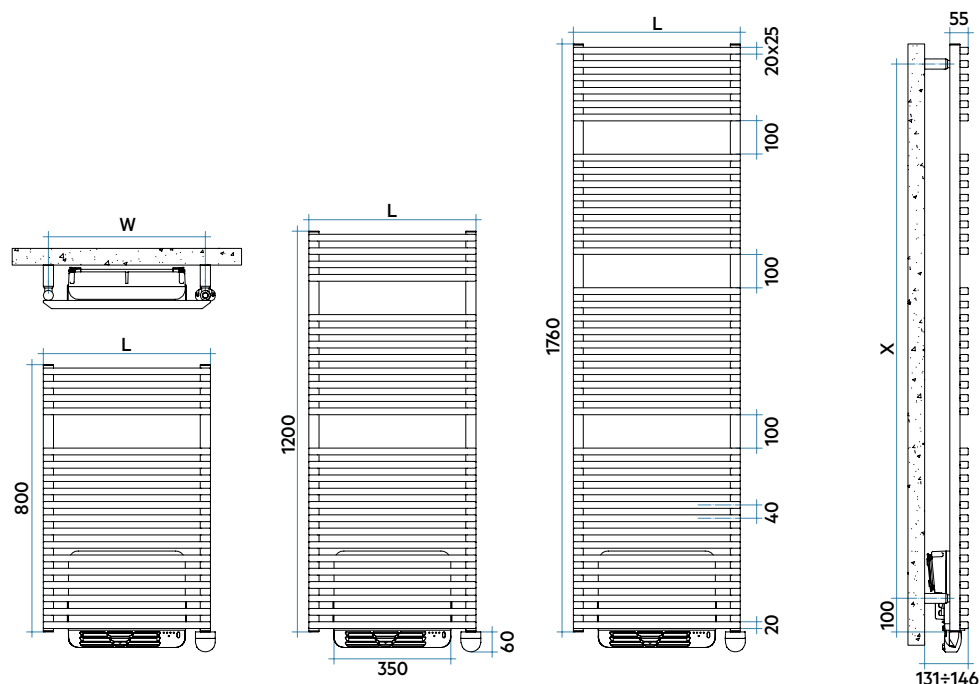

Model	Code	Depth P mm	Height H mm	Width L mm	Weight Kg	Auxiliary heater	
						Electric Power Watt	with diffuser Watt
800 18 rails 1 espace	NRS050 Z 01 IR 01 NNN	124	860	500	15,0	500	+ 1000
1200 26 rails 2 espaces	NRM050 Z 01 IR 01 NNN	124	1260	500	20,5	750	+ 1000
1760 38 rails 3 espaces	NRE050 Z 01 IR 01 NNN	124	1820	500	28,7	1000	+ 1000

The radiator will be supplied with the resistance always mounted on the inner collector.

Key Codes

Standard White colour code - for different colour codes see the colors page

Width

Height

Packing code

NRS050Z01IR01NNN

Wireless Remote Control

NET AIR ELECTRIC is equipped with a wireless controller that allows remote management of every electric radiator function. Because the controller is wireless, it has the advantage of being quick and easy to install and does not require any modifications within the home.

Technical specifications

- Wireless communication via radio signals transmitted to the receiver connected to the system
- Radiofrequency communication pursuant to European standards
- Operating modes: Manual, Automatic, Comfort, Economy, Holidays
- You can activate 3 manual functions, automatic and holiday
- Can be set comfort temperature of 5°C to 30°C
- Optional ITCS (Intelligent Temperature Control System)
- Open window detection function

