



Technical features:

- steel towel warmer radiator
- horizontal elements featuring rectangular tubes 20x25 mm section
- side round manifolds with a 30 mm diameter
- manifold threading 1/2" Gas right
- maximum working pressure 4 bar
- maximum working temperature 95°C
- radiator hydraulic equipped with a booster mounted behind the radiator with a power of 1,000 watts

Price included:


- 4 wall fixing in the same color as the radiator
- 1/2" air vent

Finishes available	Surcharge
Standard White	
Classic finished	
Special finished	
Other RAL colors	

Finishing codes see page 596.




Connections



Laterals

Connection dimensions with IRSAP valves

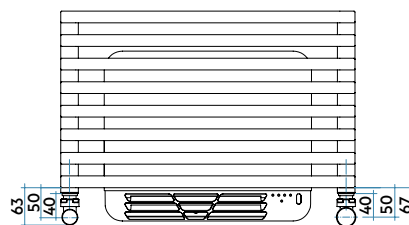


Booster



MAIN CHARACTERISTICS OF AIR DIFFUSER

- ON/OFF switch
- Power supply 230 V 50 Hz, 1 ph
- Power installed = 1000 W
- Insulation: CLASSE II
- Connecting to a network equipment that comes with the phase and neutral version without plug or with Schuko plug
- Protection index: IP24
- Long electricity cable: 1.200 mm
- Electronic ambient thermostat

NET AIR MIX

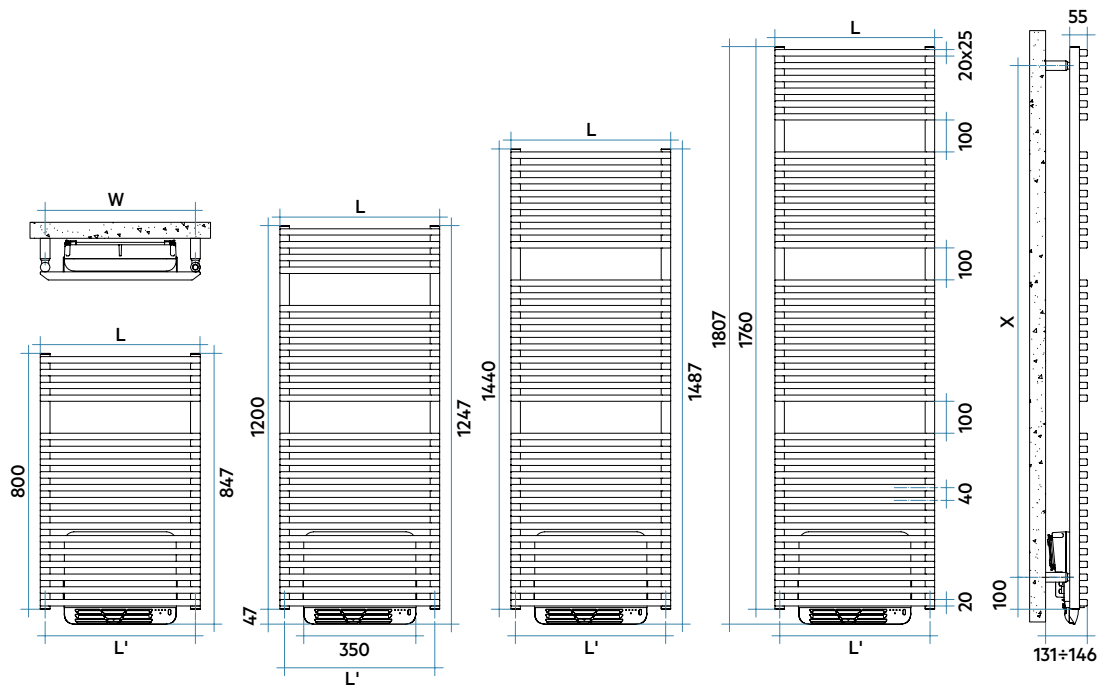


Model	Code	Depth P mm	Height H mm	Width L mm	Conn. C. L' mm	Weight Kg	Cap. lt	Thermal Power				Exp. n.	Auxiliary heater	
								$\Delta t=50^{\circ}\text{C}$	$\Delta t=40^{\circ}\text{C}$	$\Delta t=30^{\circ}\text{C}$	$\Delta t=20^{\circ}\text{C}$		with diffuser	Watt
800 18 rails 1 espace	NRS050 B 01 IR 01 NNN	124	894	500	470	10,2	4,6	1525	447	340	239	145	1,230	+ 1000
1200 26 rails 2 espaces	NRM050 B 01 IR 01 NNN	124	1294	500	470	13,7	6,7	2252	660	504	355	218	1,211	+ 1000
1440 32 rails 2 espaces	NRL050 B 01 IR 01 NNN	124	1534	500	470	16,2	8,2	2672	783	597	421	257	1,216	+ 1000
1760 38 rails 3 espaces	NRE050 B 01 IR 01 NNN	124	1854	500	470	18,8	9,8	3214	942	718	507	310	1,214	+ 1000

(*) Thanks to the high performance of Irsap NET AIR MIX radiators, the ideal Δt for low temperature projects is Δt at 30°C .
For Δt different from 50°C use the formula: $Q=Q_n (\Delta t / 50)^n$


Key Codes

Key Codes				Standard White colour code - for different colour codes see the colors page			
Width							
NR S 050 B				01	IR	01	NNN
Height		Packing code		Standard hydraulic code connection			

Decorative & Technical Accessories



Kit Valves and
Lockshield valve
Pag. 562



Pipe cover kit
Pag. 566

Wireless Remote Control for booster control

NET Air Mix is equipped with a wireless controller that allows remote management of every electric radiator function. Because the controller is wireless, it has the advantage of being quick and easy to install and does not require any modifications within the home.

REELETTAS2501N

Technical specifications

- Wireless communication via radio signals transmitted to the receiver connected to the system.
- Approx. 30-50 metre range in residential environments (868 MHz).
- Radiofrequency communication pursuant to European standards.
- You can activate the manual functions

