



ODDO
height 1584 mm, lenght 600 mm. Quartz 1 finish (cod. 1C).



Technical features:

- steel towel warmer radiator
- horizontal elements featuring semi-oval tubes 40x23 mm diameter
- side manifolds with semi-oval section 50x36,5 mm
- manifold threading and central connections (50 mm) 1/2" Gas right
- maximum working pressure 6 bar
- maximum working temperature 95°C
- reversible

Price included:

- 4 wall fixing in the same color as the radiator
- air vent

Special options and surcharges:

Radiators can be supplied with no. 1 1/2" coupling welded laterally for the connection to a single-pipe system and no. 2 1/2" couplings welded laterally to a manifold (Cod. B10). If the second coupling comes at a height that is lower than the half the radiator's total height, a diaphragm is welded inside to the manifold for optimized water circulation.

Surcharge for two 1/2" couplings welded to a lateral manifold and an internal diaphragm **(Cod. B10)**

Surcharge for two 1/2" couplings welded to a lateral manifold and an internal diaphragm **(Cod. B 99)**

Surcharge for one 1/2" coupling welded to a lateral manifold **(Cod. B12 left, Cod. B16 right)**

CAUTION: when this latter special working is present, correct operation is possible only when the lower outlet coupling is in axial alignment with the lowest pipe. Whenever this coupling is higher, all the pipes below will remain cold because they are not involved in the flow of water.

REVERSIBLE RADIATOR



ODDO, towel warmer with frame, characterized by a dual personality. The choice of the aesthetic side is interpreted at the time of installation, side with rounded tube, side with flat tube.


Finishes available

Standard White
Classic finished
Special finished
Other RAL colors

Surcharge


Finishing codes see page 596.

Connections

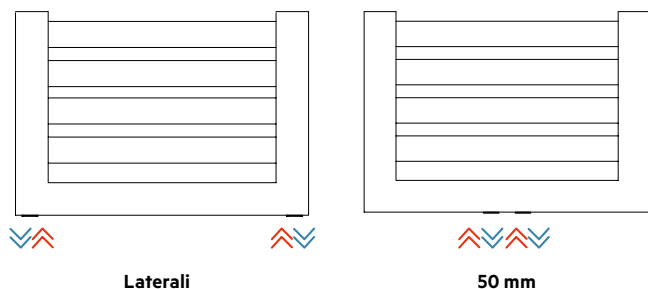


For other types of connections see pag. 414


Connection dimensions with IRSAP valves

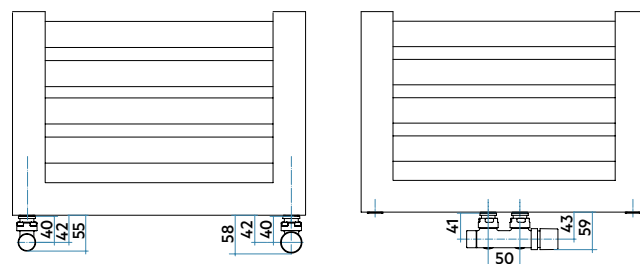


cod. B10

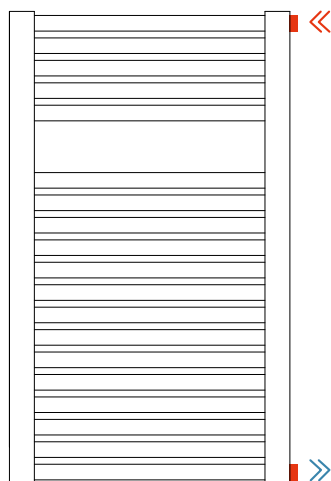


cod. B99

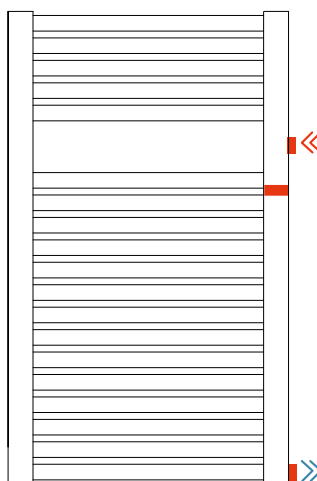

cod. B12 left
cod. B16 right

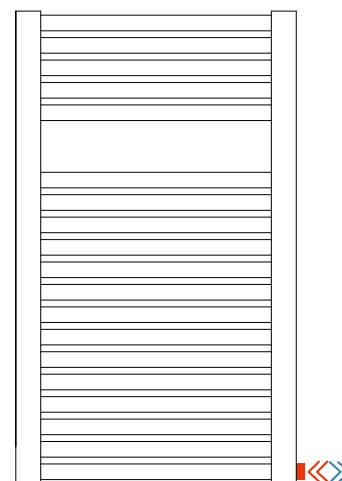

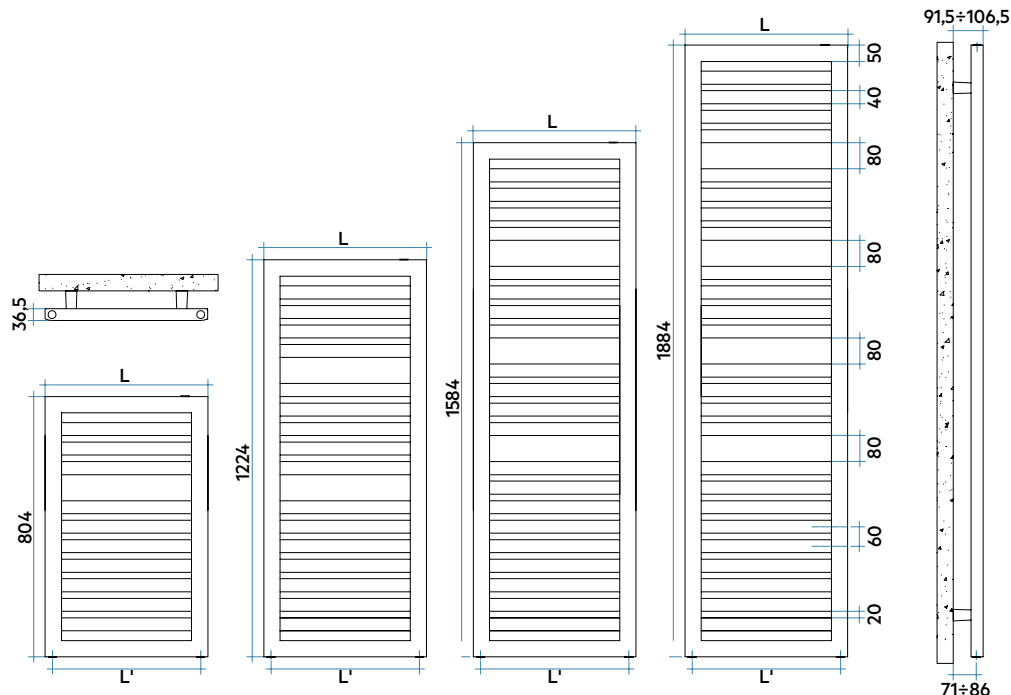

Model	Code	Depth	Height	Conn.		Weight	Cap.	Thermal Power					Exp.			
				mm	mm			mm	mm	Kg	lt	Δt=50°C		Δt=40°C	Δt=30°C	Δt=20°C
												Btu/h		Watt	Watt	Watt (°)
804 10 rails 1 espace	LES045 B 01 IR 01 NNN	36,5	804	450	406	8,9	5,9	1276	374	285	200	122	1,224			
	LES050 B 01 IR 01 NNN	36,5	804	500	456	9,7	6,4	1396	409	311	218	133	1,229			
	LES060 B 01 IR 01 NNN	36,5	804	600	556	11,2	7,5	1634	479	363	254	154	1,238			
1224 16 rails 2 espaces	LEM045 B 01 IR 01 NNN	36,5	1224	450	406	13,1	8,7	1880	551	415	289	173	1,265			
	LEM050 B 01 IR 01 NNN	36,5	1224	500	456	14,2	9,4	2061	604	455	317	190	1,265			
	LEM060 B 01 IR 01 NNN	36,5	1224	600	556	16,4	10,9	2422	710	536	372	223	1,263			
1584 21 rails 3 espaces	LEL045 B 01 IR 01 NNN	36,5	1584	450	406	16,6	11,0	2334	684	517	360	216	1,258			
	LEL050 B 01 IR 01 NNN	36,5	1584	500	456	17,9	11,9	2569	753	569	396	238	1,259			
	LEL060 B 01 IR 01 NNN	36,5	1584	600	556	20,7	13,8	3044	892	674	469	282	1,259			
1884 25 rails 4 espaces	LEE045 B 01 IR 01 NNN	36,5	1884	450	406	19,4	12,9	2815	825	621	430	257	1,274			
	LEE050 B 01 IR 01 NNN	36,5	1884	500	456	21,0	14,0	3081	903	680	471	281	1,273			
	LEE060 B 01 IR 01 NNN	36,5	1884	600	556	24,2	16,1	3610	1058	797	553	331	1,269			

Mix.	Code
Funct.	
300	ANRES300WDI
400	ANRES400WDI
400	ANRES400WDI
400	ANRES400WDI
400	ANRES400WDI
700	ANRES700WDI
700	ANRES700WDI
700	ANRES700WDI
700	ANRES700WDI
700	ANRES700WDI
1000	ANRES1000WDI

Electric heater for Dual Power

BATHROOMS
RADIATORS

(*) Thanks to the high performance of Irsap ODDO radiators, the ideal Δt for low temperature projects is Δt at 30°C.

For Δt different from 50°C use the formula: $Q = Q_n (\Delta t / 50)^\alpha$

To order a radiator in the mixed version put the code of the Standard version + the code of the corresponding electric heater


Example: Mod. 1584 x 600: **LEL060B 01 IR 01 NNN** (€ 455,76) + **ANRES700WDI** (€ 183,57) = Tot. € 639,33

Key Codes


Width	Standard White colour code - for different colour codes see the colors page
LE S 045 B	
Height	Packing code
01	
	Standard hydraulic code connection
IR 01	
NNN	

Width	Standard White colour code - for different colour codes see the colors page
LE S 045 B	
Height	Packing code
01	
	Code for 50 mm couplings
IR 05	
NNN	


Decorative & Technical Accessories



Kit Valves and
Lockshield valve
Pag. 562



Pipe cover kit
Pag. 566



Electronic Control
Pag. 574

