

**QUADRAQUA**

height 1828 mm, lenght 300 mm. Standard White finish (cod. 01).  
Designed by Domenico De Palo



**Technical features:**

- radiating panel
- 1/2" Gas right threading
- maximum working pressure 4 bar
- maximum working temperature 95°C


**Price included:**

- angle pattern valve and lockshield valve assembly complete with copper fitting (12, 14 and 15 mm diameter) multilayer (14 thick 2 and 16 thick 2)
- kit of pipe covers (suitable for pipes up to 16 mm thick)
- 4 wall fixing
- air vent


| Finishes available | Surcharge |
|--------------------|-----------|
| Standard White     |           |
| Classic finished   |           |
| Special finished   |           |
| Other RAL colors   |           |

Finishing codes see page 596.

## QUADRAQUA S

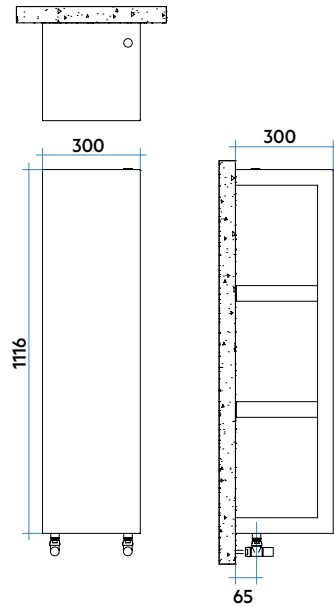

## QUADRAQUA L

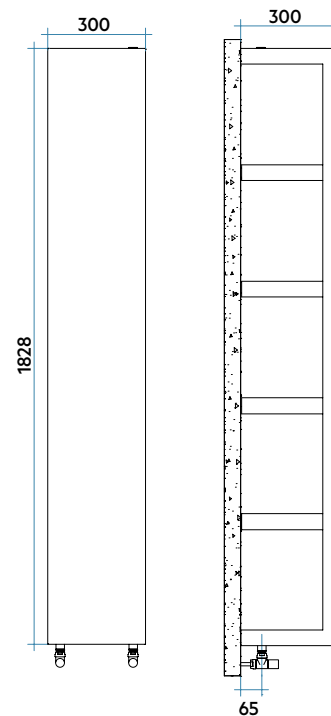

DESIGN  
RADIATORS


| Model       | Code                      | Depth<br>mm | Height<br>mm | Width<br>mm | Conn. C.<br>mm | Weight<br>Kg | Cap.<br>lt | Thermal Power                          |            |                                       |                                           |                                       | Exp.<br>n. |
|-------------|---------------------------|-------------|--------------|-------------|----------------|--------------|------------|----------------------------------------|------------|---------------------------------------|-------------------------------------------|---------------------------------------|------------|
|             |                           |             |              |             |                |              |            | $\Delta t=50^{\circ}\text{C}$<br>Btu/h | Watt       | $\Delta t=40^{\circ}\text{C}$<br>Watt | $\Delta t=30^{\circ}\text{C}$<br>Watt (*) | $\Delta t=20^{\circ}\text{C}$<br>Watt |            |
| QUADRAQUA S | <b>QDRS030B XX IR NNN</b> | 300         | 1116         | 300         | 224            | 29,0         | 2,3        | 1423                                   | <b>417</b> | 317                                   | <b>223</b>                                | 136                                   | 1,222      |
| QUADRAQUA L | <b>QDRL030B XX IR NNN</b> | 300         | 1828         | 300         | 224            | 44,3         | 3,5        | 2238                                   | <b>656</b> | 497                                   | <b>348</b>                                | 211                                   | 1,240      |

(\*) Thanks to the high performance of Irsap QUADRAQUA radiators, the ideal  $\Delta t$  for low temperature projects is  $\Delta t$  at  $30^{\circ}\text{C}$ .  
For  $\Delta t$  different from  $50^{\circ}\text{C}$  use the formula:  $Q=Q_n (\Delta t / 50)^n$

### Key Codes

|             |              |
|-------------|--------------|
| Width       | Finish code  |
| QDR S 030 B | XX           |
| Height      | Packing code |
| IR          | NNN          |

### Decorative & Technical Accessories



Pipe cover kit  
Pag. 566

