

TESI CHROME-PLATED



TESI CHROME-PLATED

12 elements, height 2000 mm, lenght 564 mm. Chrome-plated finish (cod. 50).



Technical features:

- sheet steel tubes with diameter 25 mm
- moulded sheet steel manifolds
- element length 45 mm (element pitch)
- manifold top and bottom end threads 1/2" G right
- maximum allowed working pressure 10 bar
- maximum allowed working temperature 95°C

Price included:

- kit for fixing to the wall in a finish chrome-plated
- hydraulic connection kit (valve and lockshield valve) in chrome-plated finish
- chrome-plated vent valve kit
- kit of chrome-plated finished pipe covers and hole cover kit (rosettes)
- 1 1/2" end plug complete with chrome-plated cover

N.B.: The hydraulic connection kit, supplied with the radiator, includes valve and lockshield valve in the angled version, complete with connections for connection with copper pipes (diameters 12, 14 and 15 mm) and multilayer pipes (14 thick 2 and 16 thick . 2).

Finishes available	Surcharge
Chrome-plated (cod. 50)	



TESI 2 CHROME-PLATED

TESI 2 CHROME-PLATED								Thermal Power					
Model	Code	Depth	Height	Width	Conn. c.	Weight	Cap.	Δt=50°C	Δt=40°C	Δt=30°C	Δt=20°C	Exp.	
		mm	H mm	L mm	L' mm	Kg	lt	Btu/h	Watt	Watt	Watt (°)	Watt	n.
1800 08 el.	RG 2 1800 08 50 IR 02 N	65	1802	384	1735	26,6	13,1	2578	756	562	384	225	1,325
1800 10 el.	RG 2 1800 10 50 IR 02 N	65	1802	474	1735	33,2	16,4	3223	945	703	480	281	1,325
1800 12 el.	RG 2 1800 12 50 IR 02 N	65	1802	564	1735	39,8	19,7	3868	1134	844	576	337	1,325
2000 08 el.	RG 2 2000 08 50 IR 02 N	65	2002	384	1935	28,6	14,4	2885	846	629	429	250	1,328
2000 10 el.	RG 2 2000 10 50 IR 02 N	65	2002	474	1935	35,8	18,0	3606	1057	786	536	313	1,328
2000 12 el.	RG 2 2000 12 50 IR 02 N	65	2002	564	1935	43,0	21,6	4327	1268	943	643	376	1,328

TESI 3 CHROME-PLATED

TESI 3 CHROME-PLATED								Thermal Power					
Model	Code	Depth	Height	Width	Conn. c.	Weight	Cap.	Δt=50°C	Δt=40°C	Δt=30°C	Δt=20°C	Exp.	
		mm	H mm	L mm	L' mm	Kg	lt	Btu/h	Watt	Watt	Watt (°)	Watt	n.
1800 08 el.	RG 3 1800 08 50 IR 02 N	101	1802	384	1735	35,6	19,4	3553	1042	774	529	309	1,327
1800 10 el.	RG 3 1800 10 50 IR 02 N	101	1802	474	1735	44,5	24,3	4441	1302	968	661	386	1,327
1800 12 el.	RG 3 1800 12 50 IR 02 N	101	1802	564	1735	53,4	29,2	5329	1562	1162	793	463	1,327
2000 08 el.	RG 3 2000 08 50 IR 02 N	101	2002	384	1935	38,7	21,4	3953	1158	862	590	346	1,321
2000 10 el.	RG 3 2000 10 50 IR 02 N	101	2002	474	1935	48,4	26,8	4941	1448	1078	737	432	1,321
2000 12 el.	RG 3 2000 12 50 IR 02 N	101	2002	564	1935	58,1	32,2	5929	1738	1294	884	518	1,321

(*) Thanks to the high performance of Irsap TESI CHROME-PLATED radiators, the ideal Δt for low temperature projects is Δt at 30°C.

For Δt different from 50°C use the formula: $Q=Q_n (\Delta t / 50)^n$

Starting from 2010 sales, the whole range of TESI radiators is guaranteed for 10 years.

The chrome plating is guaranteed for the period of time established by law, in any case not less than 24 months.

Key Codes

Height
Chrome-plated finish code
Hydraulic connection code.
For different connections see figures and codes above


RG 2 1800 08 | 50 | IR | 02 | N

Number of columns Number of elements Packing code


HYDRAULIC FITTINGS

The configurations available are:


- 1) **Cod. 02** Lateral and counterpoised connection (fig. 1 and 2)
- 2) **Cod. 08** Connection of first and last element with internal diaphragm (fig. 3)

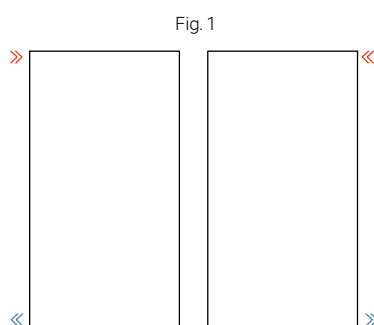

Cod. 02

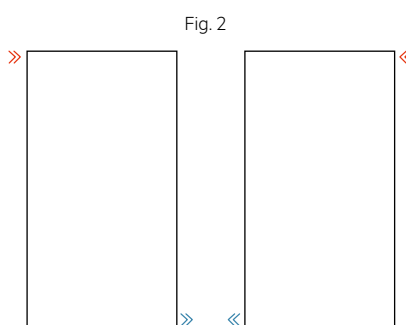






Cod. 02



Cod. 08





TESI CHROME-PLATED

TESI 2 CHROME-PLATED

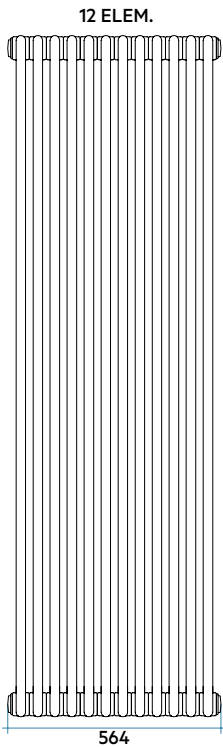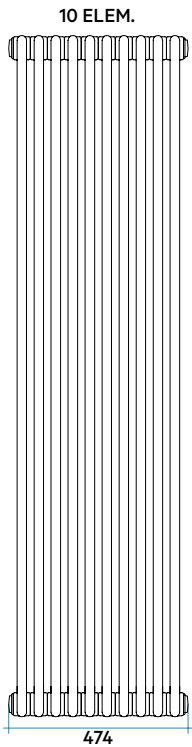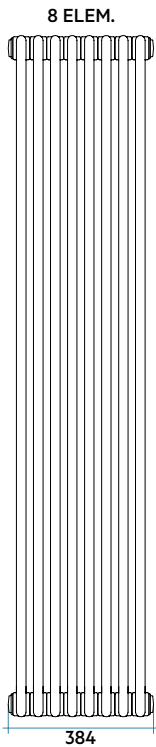

H mm	H' mm
1802	1735
2002	1935

TESI 3 CHROME-PLATED

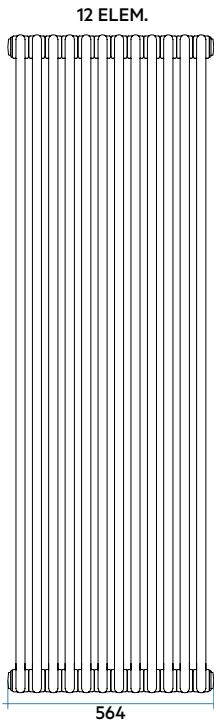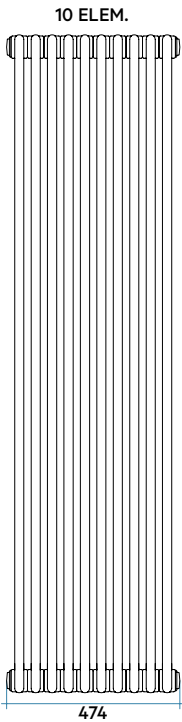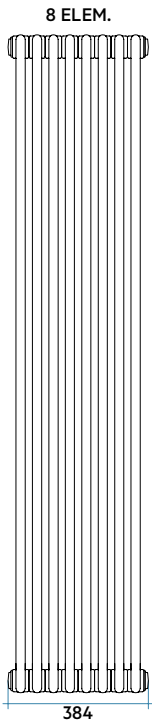

H mm	H' mm
1802	1735
2002	1935

