



VENUS CHROME-PLATED

height 1720 mm, lenght 595 mm. Chrome-plated finish (cod. 50).



Technical features:

- steel towel warmer radiator
- horizontal elements featuring round tubes with a 23 mm diameter
- side manifolds with a 40x30 mm semioval section
- manifold threading and central connections (50 mm) 1/2" Gas right
- maximum working pressure 8 bar
- maximum working temperature 95°C

Price included:


- 4 chrome-plated infratube for wall fixing
- 1/2" chrome-plated air vent

Finishes available

Chrome-plated


Surcharge


Connections

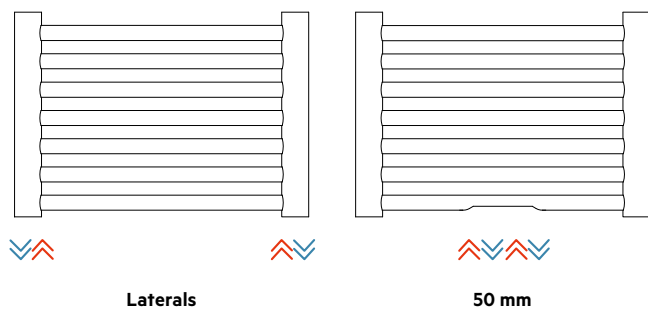

For other types of connections see pag. 414

Connection dimensions with IRSAP valves

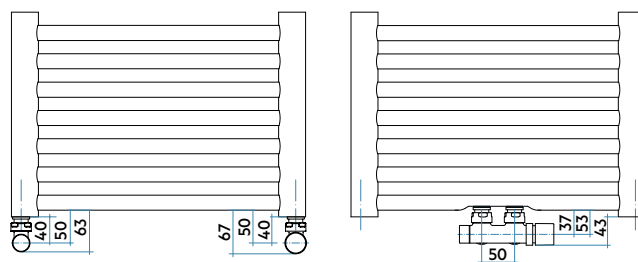

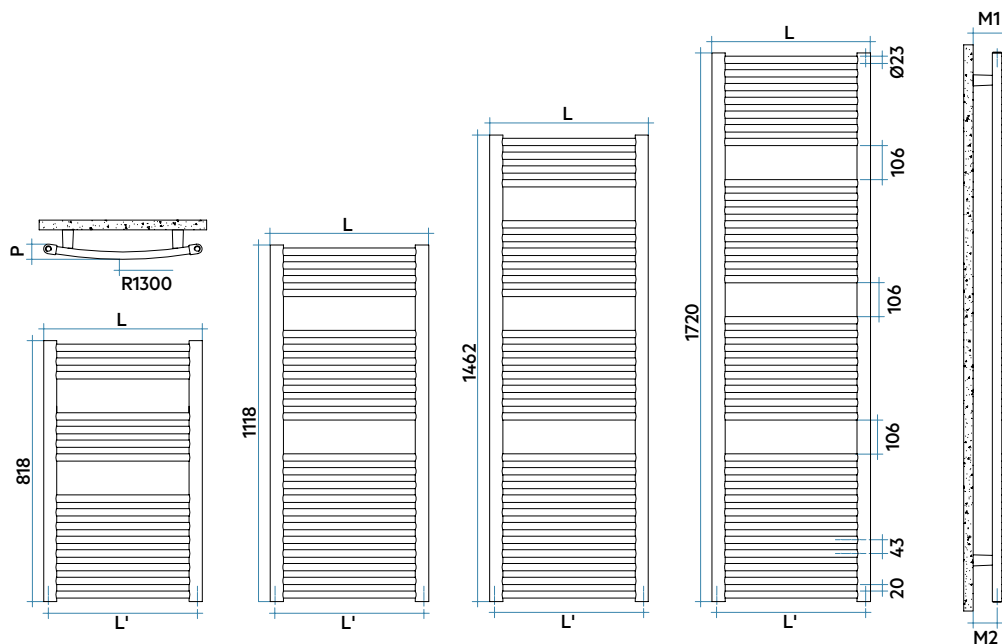

L mm	P mm	M1 mm	M2 mm
428	42	91÷106	65÷80
497	48	92÷107	60÷75
595	57	97÷112	54÷69
740	76	102÷117	42÷54



		Conn.						Thermal Power					
Model	Code	Depth	Height	Width	centre	Weight	Cap.	Δt=50°C	Δt=40°C	Δt=30°C	Δt=20°C	Exp.	
		mm	mm	mm	mm	Kg	lt	Btu/h	Watt	Watt	Watt (°C)	Watt	n.
818 15 rails 2 espaces	MISO45 B 50 IR 01 NNN	43	818	448	418	4,7	3,5	746	219	165	114	68	1,269
	MISO50 B 50 IR 01 NNN	48	818	497	467	5,0	3,8	815	239	180	125	75	1,266
	MISO60 B 50 IR 01 NNN	57	818	595	565	5,8	4,3	951	279	210	147	88	1,258
	MISO75 B 50 IR 01 NNN	76	818	740	710	8,9	4,8	1155	338	256	179	108	1,247
1118 22 rails 2 espaces	MIM045 B 50 IR 01 NNN	43	1118	448	418	6,6	5,0	1077	316	238	166	100	1,259
	MIM050 B 50 IR 01 NNN	48	1118	497	467	7,2	5,4	1182	346	262	182	110	1,257
	MIM060 B 50 IR 01 NNN	57	1118	595	565	8,2	6,1	1392	408	308	215	129	1,253
	MIM075 B 50 IR 01 NNN	76	1118	740	710	12,8	6,9	1706	500	379	265	160	1,246
1462 28 rails 3 espaces	MIL045 B 50 IR 01 NNN	43	1462	448	418	8,5	6,4	1373	402	305	213	129	1,245
	MIL050 B 50 IR 01 NNN	48	1462	497	467	9,2	6,9	1508	442	335	234	141	1,247
	MIL060 B 50 IR 01 NNN	57	1462	595	565	10,5	7,9	1780	522	395	276	166	1,249
	MIL075 B 50 IR 01 NNN	76	1462	740	710	16,3	8,8	2187	641	485	338	203	1,254
1720 34 rails 3 espaces	MIG045 B 50 IR 01 NNN	43	1720	448	418	10,2	7,7	1670	489	370	258	156	1,251
	MIG050 B 50 IR 01 NNN	48	1720	497	467	11,0	8,3	1837	538	407	284	171	1,250
	MIG060 B 50 IR 01 NNN	57	1720	595	565	12,6	9,5	2171	636	482	336	203	1,249
	MIG075 B 50 IR 01 NNN	76	1720	740	710	19,7	10,6	2673	783	593	414	250	1,246

Mix. Funct.	Code
0	-
0	-
300	ANRES300WDI50
300	ANRES300WDI50
300	ANRES300WDI50
400	ANRES400WDI50
400	ANRES400WDI50
400	ANRES400WDI50
400	ANRES400WDI50
400	ANRES400WDI50
400	ANRES400WDI50
700	ANRES700WDI50
400	ANRES400WDI50
400	ANRES400WDI50
700	ANRES700WDI50
700	ANRES700WDI50

(*) Thanks to the high performance of Irsap VENUS CHROME-PLATED radiators, the ideal Δt for low temperature projects is Δt at 30°C.

For Δt different from 50°C use the formula: $Q = Q_n (\Delta t / 50)^n$

To order a radiator in the mixed version put the code of the Standard version + the code of the corresponding electric heater

Example: Mod. 1720 x 497: **MIG050 B 50 IR 01 NNN** (€ 499,02) + **ANRES400WDI50** (€ 175,13) = Tot. € 674,15

Key Codes

Width	Chrome-plated finish code
MIS 045 B	50 IR 01 NNN
Height	Packing code
	Standard hydraulic code connection

Width	Chrome-plated finish code
MIS 045 B	50 IR 05 NNN
Height	Packing code
	Code for 50 mm couplings

Decorative & Technical Accessories

