

**XILO 2**

height 1744 mm, lenght 606 mm. Brown Rust finish (cod. E1).



Technical features:

- steel towel warmer radiator
- horizontal elements featuring rectangular tubes 50x10 mm diameter
- side manifolds with a 30 mm round section
- manifold threading 1/2" Gas right
- maximum working pressure 4 bar
- maximum working temperature 95°C

Price included:

- 2 pair of CHELA wall brackets
- 1/2" air vent

Special options and surcharges:

Radiators can be supplied with no. 1 1/2" coupling welded laterally for the connection to a single-pipe system and no. 2 1/2" couplings welded laterally to a manifold (Cod. B10).

Surcharge for two 1/2" couplings welded to a lateral manifold and an internal diaphragm (**Cod. B10**)


CAUTION: when this latter special working is present, correct operation is possible only when the lower outlet coupling is in axial alignment with the lowest pipe. Whenever this coupling is higher, all the pipes below will remain cold because they are not involved in the flow of water.

Prearrangement for monotube valve (**Cod. B14, B15**)

Finishes available	Surcharge
Standard White	
Classic finished	
Special finished	
Other RAL colors	


Finishing codes see page 596.

Connections




Laterals

Connection dimensions with IRSAP valves




For other types of connections see pag. 414


cod. B10

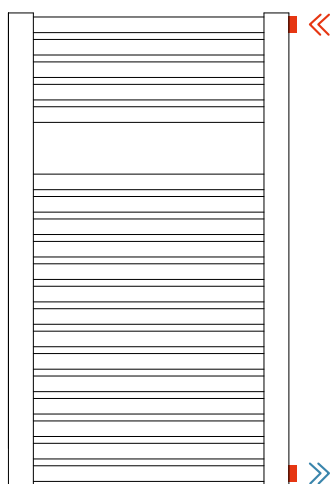


cod. B14

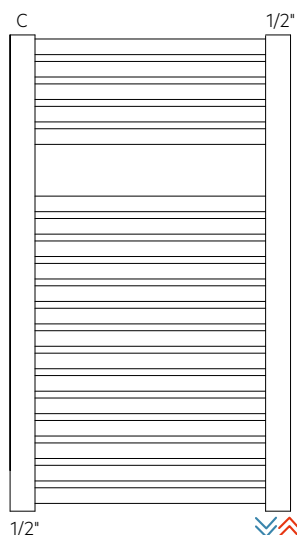

cod. B15

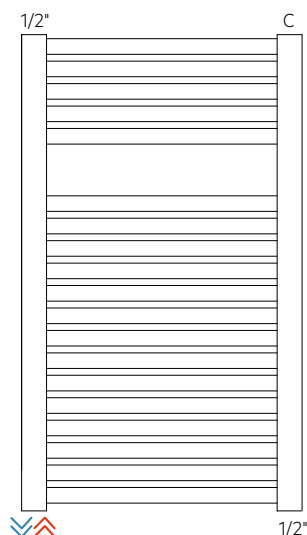

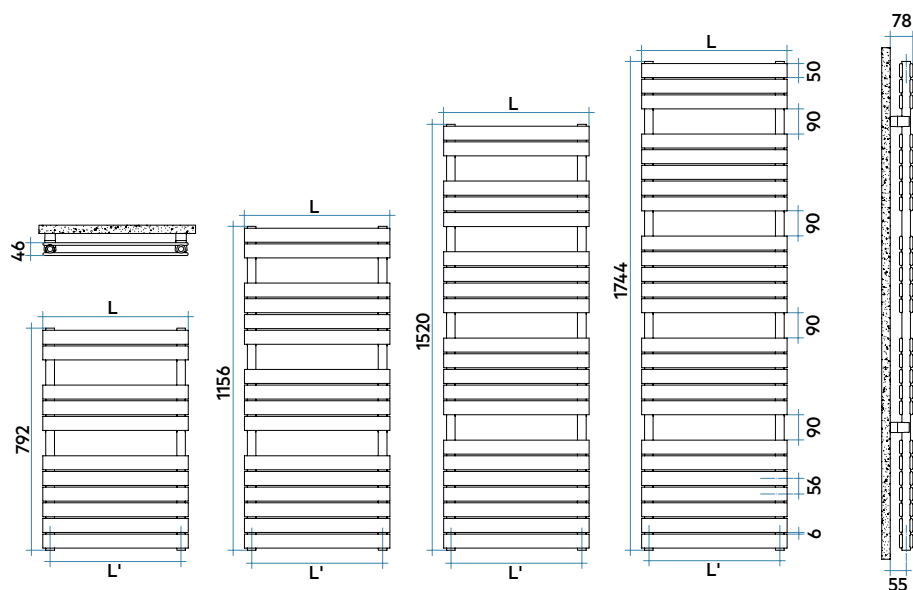

Model	Code	Depth mm	Height mm	Width mm	Conn.			Thermal Power					Exp. n.
					centre mm	Weight Kg	Cap. lt	$\Delta t=50^{\circ}\text{C}$	$\Delta t=40^{\circ}\text{C}$	$\Delta t=30^{\circ}\text{C}$	$\Delta t=20^{\circ}\text{C}$		
								Btu/h	Watt	Watt	Watt (°)	Watt	
792 22 rails 2 espaces	X2P045 B 01 IR 01 NNN	46	792	456	406	11,4	4,4	1819	533	409	290	179	1,192
	X2P050 B 01 IR 01 NNN	46	792	506	456	12,5	4,8	1986	582	446	317	196	1,189
	X2P055 B 01 IR 01 NNN	46	792	556	506	13,6	5,2	2153	631	484	344	213	1,186
	X2P060 B 01 IR 01 NNN	46	792	606	556	14,7	5,6	2320	680	522	371	230	1,184
	X2P075 B 01 IR 01 NNN	46	792	756	706	18,0	6,8	2821	827	636	454	282	1,175
1156 32 rails 3 espaces	X2M045 B 01 IR 01 NNN	46	1156	456	406	16,6	6,5	2474	725	555	393	242	1,198
	X2M050 B 01 IR 01 NNN	46	1156	506	456	18,2	7,0	2709	794	608	431	266	1,195
	X2M055 B 01 IR 01 NNN	46	1156	556	506	19,8	7,6	2944	863	661	470	290	1,191
	X2M060 B 01 IR 01 NNN	46	1156	606	556	21,4	8,2	3179	932	715	508	314	1,187
	X2M075 B 01 IR 01 NNN	46	1156	756	706	26,2	9,8	3884	1138	875	624	387	1,177
1520 42 rails 4 espaces	X2L045 B 01 IR 01 NNN	46	1520	456	406	21,8	8,5	3040	891	673	468	281	1,259
	X2L050 B 01 IR 01 NNN	46	1520	506	456	23,9	9,2	3329	976	739	516	311	1,247
	X2L055 B 01 IR 01 NNN	46	1520	556	506	26,0	10,0	3619	1061	805	565	342	1,234
	X2L060 B 01 IR 01 NNN	46	1520	606	556	28,1	10,7	3909	1146	872	614	374	1,222
	X2L075 B 01 IR 01 NNN	46	1520	756	706	34,4	12,9	4778	1400	1075	765	473	1,184
1744 50 rails 4 espaces	X2G045 B 01 IR 01 NNN	46	1744	456	406	25,8	10,0	3383	992	750	524	315	1,250
	X2G050 B 01 IR 01 NNN	46	1744	506	456	28,3	10,9	3734	1094	830	581	351	1,240
	X2G055 B 01 IR 01 NNN	46	1744	556	506	30,8	11,8	4085	1197	910	638	388	1,231
	X2G060 B 01 IR 01 NNN	46	1744	606	556	33,3	12,7	4436	1300	990	697	425	1,221
	X2G075 B 01 IR 01 NNN	46	1744	756	706	40,8	15,3	5488	1608	1233	875	539	1,193

Electric heater for Dual Power

Mix. Funct.	Code
400	ANRES400WDI
400	ANRES400WDI
400	ANRES400WDI
700	ANRES700WDI
700	ANRES700WDI
700	ANRES700WDI
700	ANRES700WDI
1000	ANRES1000WDI
1000	ANRES1000WDI
700	ANRES700WDI
1000	ANRES1000WDI
1000	ANRES1000WDI
1000	ANRES1000WDI
1000	ANRES1000WDI
1000	ANRES1000WDI
1000	ANRES1000WDI
1000	ANRES1000WDI
1000	ANRES1000WDI
1000	ANRES1000WDI

(*) Thanks to the high performance of Irsap XILO 2 radiators, the ideal Δt for low temperature projects is Δt at 30°C .

For Δt different from 50°C use the formula: $Q=Q_n (\Delta t / 50)^n$

To order a radiator in the mixed version put the code of the Standard version + the code of the corresponding electric heater

Example: Mod. 1156 x 556: **X2M055 B 01 IR 01 NNN** (€ 488,47) + **ANRES700WDI** (€ 183,57) = Tot. € 632,04


Key Codes

Width
Standard White colour code -
for different colour codes see the colors page


X2 P 04 5 B 01 IR 01 NNN

Height Packing code Standard hydraulic code connection


Decorative & Technical Accessories



Kit Valves and
Lockshield valve
Pag. 562



Pipe cover kit
Pag. 566



Electronic Control
Pag. 574

