



Technical features:

- electric towel warmer radiator made of steel
- horizontal elements with rectangular tubes 50x10 mm diameter
- side manifolds with 30 mm round section
- maximum working pressure 4 bar
- maximum working temperature 95°C
- radiator hydraulic equipped with a booster mounted behind the radiator with a power of 1,000 watts

Price included:


- 4 adjustable wall fixing brackets in the same color of the radiator
- 1/2" air vent

Finishes available	Surcharge
Standard White	
Classic finished	
Special finished	
Other RAL colors	

Finishing codes see page 596.




Connections



Laterals

Connection dimensions with IRSAP valves

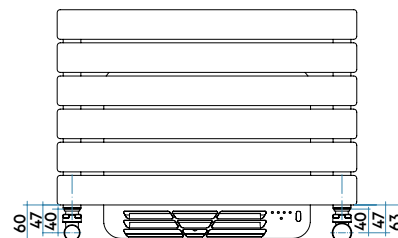


Booster



MAIN CHARACTERISTICS OF AIR DIFFUSER

- ON/OFF switch
- Power supply 230 V 50 Hz, 1 ph
- Power installed = 1000 W
- Insulation: CLASSE II
- Connecting to a network equipment that comes with the phase and neutral version without plug or with Schuko plug
- Protection index: IP24
- Long electricity cable: 1.200 mm
- Electronic ambient thermostat

XILO AIR MIX

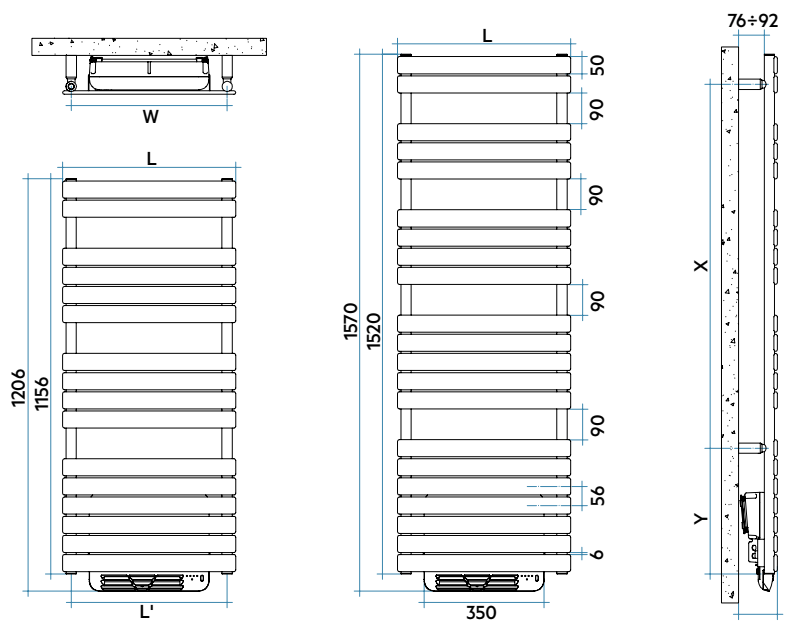

Model	Code	Depth P mm	Height H mm	Width L mm	Conn. C. L' mm	Weight Kg	Cap. lt	Thermal Power				Auxiliary heater		
								$\Delta t=50^{\circ}\text{C}$	$\Delta t=40^{\circ}\text{C}$	$\Delta t=30^{\circ}\text{C}$	$\Delta t=20^{\circ}\text{C}$	Exp.	with diffuser	
								Btu/h	Watt	Watt	Watt (°)	Watt	n.	Watt
1156 16 rails 3 espaces	XAM050 B 01 IR 01 NNN	110	1206	506	456	12,7	4,3	1902	558	429	305	189	1,178	+ 1000
1520 21 rails 4 espaces	XAL050 B 01 IR 01 NNN	110	1570	506	456	15,8	5,6	2451	718	549	388	238	1,205	+ 1000
	XAL060 B 01 IR 01 NNN	110	1570	606	556	17,9	6,3	2894	848	651	463	286	1,186	+ 1000

(*) Thanks to the high performance of Irsap XILO AIR MIX radiators, the ideal Δt for low temperature projects is Δt at 30°C .
For Δt different from 50°C use the formula: $Q=Q_n (\Delta t / 50)^n$

Key Codes

Standard White colour code - for different colour codes see the colors page

Width


Height

Packing code


Standard hydraulic code connection

XAM050 B 01 IR 01 NNN

Decorative & Technical Accessories



Kit Valves and
Lockshield valve
Pag. 562



Pipe cover kit
Pag. 566

Wireless Remote Control for booster control

XILO Air Mix is equipped with a wireless controller that allows remote management of every electric radiator function. Because the controller is wireless, it has the advantage of being quick and easy to install and does not require any modifications within the home.

REELETTAS2501N

Technical specifications

- Wireless communication via radio signals transmitted to the receiver connected to the system.
- Approx. 30-50 metre range in residential environments (868 MHz).
- Radiofrequency communication pursuant to European standards.
- You can activate the manual functions

