

XILO ELECTRIC

height 1744 mm, lenght 606 mm. Strawberry Red finish (cod. Y3).











Technical features:

- electric steel towel warmer radiator
- horizontal elements featuring rectangular tubes 50x10 mm section
- side round manifolds with a 30 mm diameter
- complete with thermal liquid
- red textile power cable, lenght 1200 mm, SCHUKO plug
- · electronic control with integrated WiFi card
- WiFi electronic control in the same color as the radiator
- class II, IP24

Finishes available	Surcharge	
Standard White		
Classic finished		
Special finished		
Other RAL colors		
Finishing codes see page 596		

Price included:

- 4 adjustable wall fixing brackets in the same color as the radiator
- the model with WiFi electronic control, type E, includes the electronics in the same finish as the radiator

WiFi control unit *

Control your radiator remotely using the Irsap.now app available from the store (Android and iOS).

Compatible with the systems:





The WiFi control, on the radiator, connects to smartphones, making product management simple and immediate, configurable by downloading the IRSAP NOW APP available from all Android and IOS stores.

This APP allows the management of multiple homes, allowing individual rooms or zones to be configured independently. The WiFi control is compatible with Google Home and Amazon Alexa.


As well as monitoring and setting the desired temperature, the WiFi control has the following functions: stand-by function, key lock function, antifreeze function, HOME/AWAY function (geolocation), holiday function, detect open window function, ITCS function (Intelligence Temperature Control System), which allows you to have the exact temperature at the set time, VOC function i.e. air quality control.

* Available only for UE and CH.





Electric

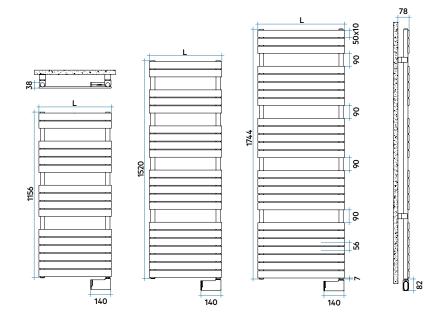

H mm	L mm	X mm	W mm
870	500	640	470
1270	500	1040	470
1830	500	1600	470

CE

Model		Code	Depth P mm	Height H mm	Width L mm	Weight Kg	Electric Power Watt	
1156 16 rails 3 espaces	ХОМО50 Е	: 01 IR 01 NNN	38	1156	506	15,0	500	
1520	XOL050 E	01 IR 01 NNN	38	1520	506	19,6	750	
21 rails 4 espaces	XOL060 E	01 IR 01 NNN	38	1520	606	22,4	1000	
1744 25 rails 4 espaces	XOG060 E	01 IR 01 NNN	38	1744	606	26,4	1200	

