



DEDALO ELECTRIC

height 1600 mm, length 660 mm. Sablé finish (cod. Y4).
Designed by Synthesis Design

**Technical features:**

- electric radiating panel
- heater heating system
- electrical power development: DEDALO P (h 900 mm) 300 Watt, DEDALO L (h 1600 mm) 700 Watt
- wireless digital electronic control featuring weekly program
- Class II insulation, IP44
- long electricity cable: 1.200 mm, lower left side cable outlet, SCHUKO plug

Price included:

- wall system connection
- wireless receiver integrated on the plate with 2 leds to signal the function mode
- programmable wireless digital transmitter
- LED lighting system optional

Finishes available**Surcharge**

Special finished

Other RAL colors

Finishing codes see page 596.


Wireless Remote Control

DEDALO Electric with wireless thermostat is equipped with a wireless controller that allows remote management of every electric radiator function. Because the controller is wireless, it has the advantage of being quick and easy to install and does not require any modifications within the home.

Technical specifications

- Wireless communication via radio signals transmitted to the receiver connected to the system.
- Approx. 30-50 metre range in residential environments (868 MHz).
- Radiofrequency communication pursuant to European standards.
- Optional ITCS (Intelligent Temperature Control System)
- Open window detection function.




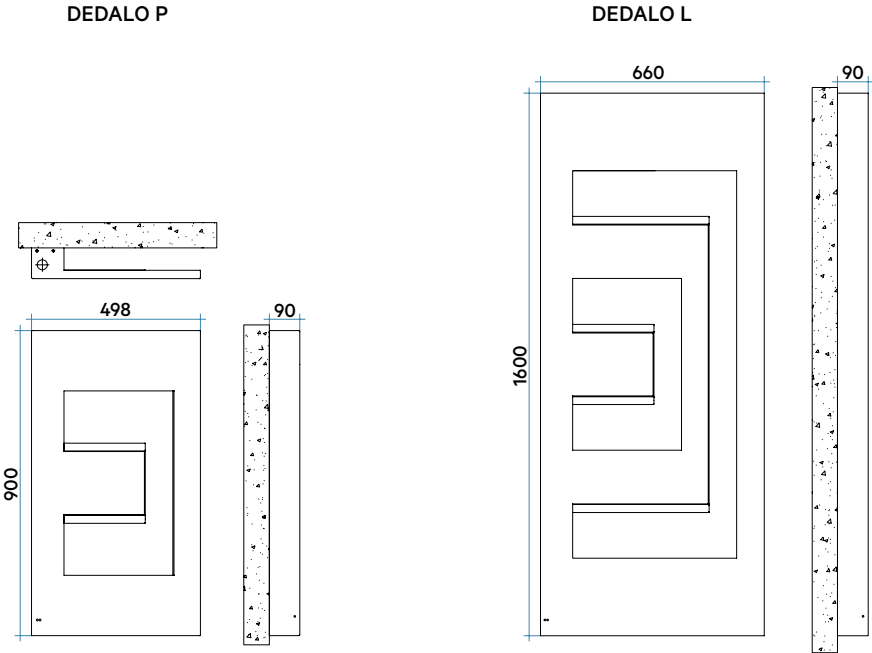

Model	Code	Depth	Height	Width	Weight	Electric Power
		P mm	H mm	L mm	Kg	Watt
DEDALO ELECTRIC	DEDP049Z XX IR NNN	90	900	498	17,2	300
	DEDL066Z XX IR NNN	90	1600	660	22,5	700
DEDALO ELECTRIC WITH LED	DEDP049Z XX IR NLN - LED-AA	90	900	498	17,2	300
	DEDL066Z XX IR NLN - LED-AA	90	1600	660	22,5	700

Key Codes

DEDALO without LED option



DEDALO with LED option



